



WALLPOD

Intelligent EV charging unit



WALLPOD

Intelligent EV charging unit

The WALLPOD is an affordable and reliable EV charging unit, which is ideal for both domestic and commercial locations, providing up to 7.4kW fast charging.

This future-proof OCPP compliant unit can offer a simple plug & charge or pay-to-charge solution via the EV driver's smartphone and/or RFID card/fob through any chosen OCPP back-office management system.

Feature-rich, this EV charger supports dynamic load balancing and is equipped with PME fault detection, so there is no requirement for an earth rod, reducing installation costs.

Domestic users can also charge their vehicle as sustainably as possible using their solar PV or other home renewables for a zero-cost, zero-carbon charge.*

*App dependent feature



FREE app & support

Domestic customers benefit from 3 years Monta app connectivity and support included*


*Data fees may apply if connecting via 4G





Product features

- Suitable for both domestic and commercial installations
- Plug & charge, mobile app or RFID controlled charging
- Universal charging socket or Type 2 tethered lead
- Up to 7.4kW charging output
- PME fault detection (no earth rod required)
- Dynamic load balancing (CT clamp & cable included)
- Solar PV, battery storage or wind turbine integration*
- OCPP 1.6 compliant (can integrate with any back-office)
- Over-the-air firmware / software updates
- Built-in 6mA DC leakage protection
- Dual tamper and breach security notifications
- Cable lock security feature (can be permanently locked by user)
- Integrated RFID reader
- MID-approved energy metering
- 4G / Wi-Fi / Ethernet connectivity
- IK10 impact resistant design
- Wall or post mounted
- OZEV grant fundable
- Designed & manufactured in the UK







Powered by

Other preferred

back-office and mobile app partners:



*App dependent feature



OCPP 1.6 compliant

Ability to integrate with any OCPP compliant back-office management system and app.



Easy to operate

Three quick and easy ways to operate: mobile app, RFID cards and fobs or plug & charge.



Office for Zero Emission Vehicles

Eligible for grant funding

This range is approved for the OZEV EV Chargepoint Grant & Workplace Charging Scheme (WCS).



4G / Wi-Fi / Ethernet enabled

Complete with secure 4G, Wi-Fi and Ethernet connectivity, ensuring chargers are always online 24/7.



Branding & colour options available

Rolec offer a bespoke chargepoint branding service; from logos & brand colours, to vinyl wraps.



No earth rod required

Equipped with built-in PME fault detection, saving on installation time and costs.



The details

UP TO 7.4KW

This single phase charger provides up to 7.4kW fast charging.

WALLPOD is compatible with all EVs & PHEVs, charging at the fastest speed possible, ensuring vehicles are ready to go in no time.

CHARGE FOR FREE!

Sync your solar PV, battery storage or wind turbine setup to benefit from sustainable, zero-cost, zero-carbon charging.

Smart home integration is also supported, so you can control your charger using Alexa or Google assistant.*

accurate BILLING

Built-in MID-approved energy metering ensures accurate consumption reporting, which is essential for businesses and residential car parks, wishing to bill for their usage. Use our back-office management platform to generate revenue by setting your own tariffs.



SECURE

Rest assured, Rolec's entire EV chargepoint range is fully UK Smart Charge Point Regulation compliant.

Over-the-air updates allow the chargers to receive the very latest features, ensuring a safe and future-proof product 24/7.

3 YEAR WARRANTY

Rolec EV chargepoints are designed, developed and manufactured in the UK and come with a 3 year warranty included as standard, for added peace of mind on your investment.

*App dependent feature





Specifications

Product Overview:

	Connection Type	Charging Output	Input Supply	Unit Colour	Product Code
Single Phase Units	1x Type 2 (IEC 62196) charging socket	Up to 7.4kW (32A)	1x 32A Single Phase 230V AC (±10 %) 50/60Hz	Grey White	ROLEC4020G ROLEC4020W ROLEC4020B
	1x Type 2 (IEC 62196) 5m tethered lead*	Up to 7.4kW (32A)	1x 32A Single Phase 230V AC (±10 %) 50/60Hz	Grey White Black	ROLEC4140G ROLEC4140W ROLEC4140B
	1x Type 2 (IEC 62196) 10m tethered lead*	Up to 7.4kW (32A)	1x 32A Single Phase 230V AC (±10 %) 50/60Hz	Grey White	ROLEC4145G ROLEC4145W ROLEC4145B

 *5 m tethered leads (approx. 4.5m external) 10m tethered leads (approx. 9.5m external)

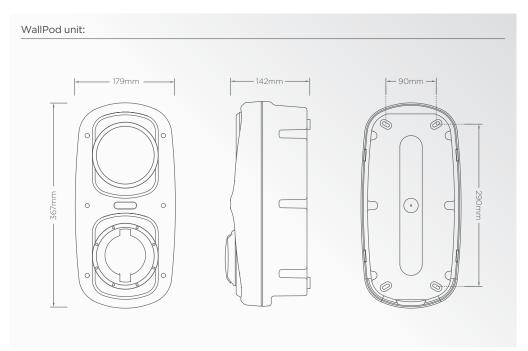





Specifications


User Interface Mobile app RRID regider (MFARE ISO/IEC 14443 A) Pilly & Acharge RRID regider (MFARE ISO/IEC 14443 A) Pilly & Acharge RRID LED status indicator halo - confligurable	Technical Data:					
Protection A Coverload & fault current protection - A dedicated 30mA Type A RCBO or equivalent protection is required at source (see page 7 for options) Lightning surge, over temperature protection PME fault detection - No earth electrode/rod required Supports automated (Aynamic load balancing (may require additional hardware) Supports automated (Aynamic load balancing (may require additional hardware) Supports automated (Aynamic load balancing (may require additional hardware) Supports static load management coftware configurable) Cable Terminals Single Phase - 3x 50mm 1P N + E Communications - 4G LTE Cab-1 (built-in nano SIM, subscription required) - 1	User Interface	RFID reader (MIFARE ISO/IEC 14443 A)Plug & charge				
required at source (see page 7 for options) Lightning surge, over temperature protection PME fault detection – No earth electrode/rod required Supports automatic dynamic load balancing (may require additional hardware) Supports static load management (software configurable) Cable Terminals Single Phase – 3x 50mm IP + N + E Communications - 4G LTE CA1 (bulls in nano SIM, subscription required) - 1	Charge Protocol	Mode 3 (IEC 61851-1)				
Communications - 4.6 LTE Cab-1. (bull-in-nano SIM, subscription required) - LTE FDD: 81/83/98/788/920/828 - LOFE DD: 81/83/98/788/920/828 - GSM 82/98/38/98/788/920/828 - GSM 82/98/38/98/788/920/828 - Wi-Fi 802.11 b/g/n 2.4 GHz (2412-2472 MHz / 2422-2462 MHz) - NFC: 13.56 MHz - RJ45 Ethernet connection - Bluetooth Low Energy (BLE 4.1) 2402-2480 MHz (for installer configuration purposes) - OCPP 1.6.1 - Cyber security - Data encryption level TLS 1.2 Energy Metering Integrated Class 1 MID compliant metering Standby Power Consumption - 7.5W Dimensions 179mm x 367mm x 142mm (W x H x D) Weight - 3kg to < 7kg(model dependant) - Ingress protection - Enclosure IP65, Socket IP54 - Impact protection - IK10 - Security - Dual tamper and breach notifications - Operating temperature - 30°C to -50°C -	Protection	required at source (see page 7 for options) Lightning surge, over temperature protection PME fault detection - No earth electrode/rod required Supports automatic dynamic load balancing (may require additional hardware)				
LTEFDD: BL/83/BS/28/78/B8/280/B28 Siskin E2/RS/BS/BS/BS/BS/BS/BS/BS/BS/BS/BS/BS/BS/BS	Cable Terminals	• Single Phase – 3x 50mm 1P + N + E				
Standby Power Consumption	Communications	 LTE FDD: B1/B3/B5/B7/B8/B20/B28 GSM: B2/B3/B5/B8 Wi-Fi 802.11 b/g/n 2.4 GHz (2412-2472 MHz / 2422-2462 MHz) NFC 13.56 MHz RJ45 Ethernet connection Bluetooth Low Energy (BLE 4.1) 2402-2480 MHz (for installer configuration purposes) OCPP 1.6J 				
Dimensions 179mm x 367mm x 142mm (W x H x D)	Energy Metering	Integrated Class 1 MID compliant metering				
## Certifications & Compliances Environmental Certifications & Compliance EV Charging Compliance EN 61851-1:2019, EN 61851-22:2002	Standby Power Consumption	< 7.5W				
Environmental • Ingress protection - Enclosure IP65, Socket IP54 • Impact protection - IK10 • Security - Dual tamper and breach notifications • Operating temperature30°C to +50°C • Operating humidity - 5% to 95% Materials High impact resistant Polycarbonate Unit Colour ■ Black ■ Grey ■ White ■ Branding available upon request • EV Charging Compliance - EN 61851-1:2019, EN 61851-22:2002 • Smart Charge Points - (SI 2021/1467) • Wiring Regulations - BS 7671:2018+A2:2022 • EMC Compliance - EN 61000-6-3:2007+A1:2011, EN 61000-6-2:2005, 2014/30 /EU, SI 2016/1091 • Safety Compliance (LVD) - EN 62368-1:2014, 2014/35/EU, SI 2016/1101 • Communications / RED - EN 62311:2008, 2014/53/EU, SI 2017/1206, EN 300 330 V2.1.1 (2017-02), EN 301 908-1 V15.1.1 (2021-09), EN 301 908-13 V13.2.1 (2022-02), EN 301 511 V12.5.1 (2017-03), EN 300 328 V2.2.2 (2019-07), EN 300 440 V2.1 (2018-07) • Environmental Protection - BS EN 60529:1992+A2:2013 • Impact Rating - BS EN 62262:2002+A1:2021 • Metering - 2014/32/EU, SI 2016/1153 • RoHS - 2011/65/EU, SI 2016/1153 • ROHS - 2011/65/EU, SI 2016/1503 • REACH - 1907/2006, REACH etc. (Amendment) Regulations 2021	Dimensions	179mm x 367mm x 142mm (W x H x D)				
Impact protection - IK10	Weight	< 3kg to < 7kg(model dependant)				
Unit Colour ■ Black ■ Grey ■ White ■ Branding available upon request ■ EV Charging Compliance - EN 61851-1:2019, EN 61851-22:2002 ■ Smart Charge Points - (SI 2021/1467) ■ Wiring Regulations - BS 7671:2018+A2:2022 ■ EMC Compliance - EN 61000-6-3:2007+A1:2011, EN 61000-6-2:2005, 2014/30 /EU, SI 2016/1091 ■ Safety Compliance (LVD) - EN 62368-1:2014, 2014/35/EU, SI 2016/1101 ■ Communications / RED - EN 62311:2008, 2014/53/EU, SI 2017/1206, EN 300 330 V2.1.1 (2017-02), EN 301 908-1 V15.1.1 (2021-09), EN 301 908-13 V13.2.1 (2022-02), EN 301 511 V12.5.1 (2017-03), EN 300 328 V2.2.2 (2019-07), EN 300 440 V2.2.1 (2018-07) ■ Environmental Protection - BS EN 60529:1992+A2:2013 ■ Impact Rating - BS EN 62262:2002+A1:2021 ■ Metering - 2014/32/EU, SI 2016/1153 ■ RoHS - 2011/65/EU, SI 2012/3032 ■ REACH - 1907/2006, REACH etc. (Amendment) Regulations 2021	Environmental	 Impact protection - IK10 Security - Dual tamper and breach notifications Operating temperature30°C to +50°C 				
Certifications & Compliances • EV Charging Compliance - EN 61851-1:2019, EN 61851-22:2002 • Smart Charge Points - (SI 2021/1467) • Wiring Regulations - BS 7671:2018+A2:2022 • EMC Compliance - EN 61000-6-3:2007+A1:2011, EN 61000-6-2:2005, 2014/30 /EU, SI 2016/1091 • Safety Compliance (LVD) - EN 62368-1:2014, 2014/35/EU, SI 2016/1101 • Communications / RED - EN 62311:2008, 2014/53/EU, SI 2017/1206, EN 300 330 V2.1.1 (2017-02), EN 301 908-1 V15.1.1 (2021-09), EN 301 908-13 V13.2.1 (2022-02), EN 301 511 V12.5.1 (2017-03), EN 300 328 V2.2.2 (2019-07), EN 300 440 V2.2.1 (2018-07) • Environmental Protection - BS EN 60529:1992+A2:2013 • Impact Rating - BS EN 62262:2002+A1:2021 • Metering - 2014/32/EU, SI 2016/1153 • RoHS - 2011/65/EU, SI 2012/3032 • REACH - 1907/2006, REACH etc. (Amendment) Regulations 2021	Materials	High impact resistant Polycarbonate				
 Smart Charge Points - (SI 2021/1467) Wiring Regulations - BS 7671:2018+A2:2022 EMC Compliance - EN 61000-6-3:2007+A1:2011, EN 61000-6-2:2005, 2014/30 /EU, SI 2016/1091 Safety Compliance (LVD) - EN 62368-1:2014, 2014/35/EU, SI 2016/1101 Communications / RED - EN 62311:2008, 2014/53/EU, SI 2017/1206, EN 300 330 V2.1.1 (2017-02), EN 301 908-1 V15.1.1 (2021-09), EN 301 908-13 V13.2.1 (2022-02), EN 301 511 V12.5.1 (2017-03), EN 300 328 V2.2.2 (2019-07), EN 300 440 V2.2.1 (2018-07) Environmental Protection - BS EN 60529:1992+A2:2013 Impact Rating - BS EN 62262:2002+A1:2021 Metering - 2014/32/EU, SI 2016/1153 ROHS - 2011/65/EU, SI 2012/3032 REACH - 1907/2006, REACH etc. (Amendment) Regulations 2021 	Unit Colour	Black Grey White Branding available upon request				
Certification Markings - CE & ONCA	Certifications & Compliances	 Smart Charge Points - (SI 2021/1467) Wiring Regulations - BS 7671:2018+A2:2022 EMC Compliance - EN 61000-6-3:2007+A1:2011, EN 61000-6-2:2005, 2014/30 /EU, SI 2016/1091 Safety Compliance (LVD) - EN 62368-1:2014, 2014/35/EU, SI 2016/1101 Communications / RED - EN 62311:2008, 2014/53/EU, SI 2017/1206, EN 300 330 V2.1.1 (2017-02), EN 301 908-1 V15.1.1 (2021-09), EN 301 908-13 V13.2.1 (2022-02), EN 301 511 V12.5.1 (2017-03), EN 300 328 V2.2.2 (2019-07), EN 300 440 V2.2.1 (2018-07) Environmental Protection - BS EN 60529:1992+A2:2013 Impact Rating - BS EN 62262:2002+A1:2021 Metering - 2014/32/EU, SI 2016/1153 RoHS - 2011/65/EU, SI 2012/3032 REACH - 1907/2006, REACH etc. (Amendment) Regulations 2021 				
		- Certification Markings - CE & ONCA	CA C			



Options & accessories

Product Code	Item Description	
RFID0010 RFID0020	RFID card RFID fob	
EVFP0010 EVFP0030 EVFP0040	WallPod galvanised steel mounting post - 1350mm Mounting post - fits up to 2 chargers WallPod plate for mounting post	
EVCB0020 EVCB0040	Root mount protection barrier - 48mm Surface mount protection barrier - 48mm	
EVPS0010	EV parking sign - A4 landscape (Other sizes are available)	
EVPP0100 EVPP0107	5m 32A Type 2 to Type 2 charging cable 10m 32A Type 2 to Type 2 charging cable (Other cables are available, including Type 1 options)	
EVIN0010 EVIN0015	20A Single phase EV consumer unit with Type A RCBO 40A Single phase EV consumer unit with Type A RCBO	
EVRS0030 ACSR0125	Remote wall mount for Type 2 plug holster 100A up to 35mm ² screened CT clamp with 10m cable	



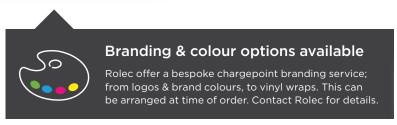

Brand names, logos and trademarks used herein remain the property of their respective owners. This listing of any firm or their logos is not intended to imply any endorsement or direct affiliation with Rolec Services Ltd. and is purely to demonstrate branding opportunities.












Chargepoint management



Monta's chargepoint management platform provides businesses and organisations with the ability to deploy and self-manage their very own electric vehicle charging network. Ideal for workplace, fleet, commercial and residential locations.



- Full & automated control of your chargepoints
- Of Unlock additional revenue streams
- Set chargepoints for public and/or private use
- Set different pricing for individual chargepoints & groups
- Mr Dynamic pricing allows operators to set pricing in line with their hour-by-hour energy cost
- + 🕅 Fully scalable solution; add or remove chargepoints & users
- Complete fleet management solutions with analytical feedback & reporting
- Reduce charging costs and CO₂ with Smart Charge feature
- Vehicle integration provides visibility of battery size, SOC, percentage & location etc.
- Automatically reimburse employees' home charging
- Smart queuing system that sends notifications to drivers when they become available
- Over-the-air updates and self-healing algorithms ensure charger stability & availability
- Static, Dynamic or True Dynamic load balancing options
- EV Roaming feature, allowing chargepoints to be available on other apps

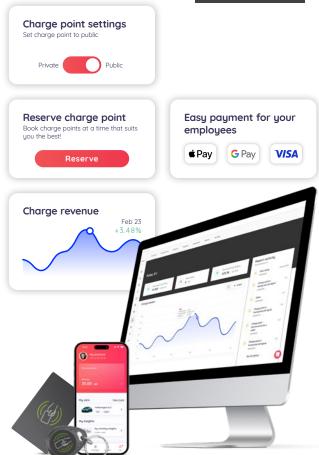

For more information about Monta's chargepoint management solutions and pricing, see the Powered by Monta Overview Sheet



Chargepoint operation



Charge your EV on your terms. With Monta you have full control over your charging experience, at home or on the road.

- Easily locate and navigate using the chargepoint map
- Remotely control your home EV charging
- Choose your ready time and choose to prioritise lower costs, lower CO₂ or only using renewable energy
- Schedule charges so your car is ready when you are
- Integrate with most EV manufacturer apps and cars
- Real-time information on your car and battery levels to maximize your charging experience
- Share and give charging access to friends, family and guests
- Set your home charger for public use with custom pricing
- 🔼 Access to over 300,000 public chargepoints across Europe
- Easily initiate charging and complete payments via credit card, Apple Pay, Google Pay or Monta Wallet
- $oldsymbol{\mathbb{Q}}$ Online chat or support line for help when you need it most







RFID activation

Great for quick activation, RFID cards or key fobs are easily accessible and add for a much simpler charging experience, which can also be used alongside the mobile app.



DOWNLOAD THE APP





For more details about the Monta solution for EV drivers and the Monta app, please visit www.monta.com/uk/home-charging



THIS DOCUMENT CONTAINS INFORMATION THAT IS SUBJECT TO CHANGE WITHOUT NOTICE.

 $The \ latest\ version\ of\ this\ publication\ can \ be\ downloaded\ at\ https://www.rolecserv.com/downloads-ev-charging$

Illustrations of the product and user interface are for marketing purposes only.

Brand names, logos and trademarks used herein remain the property of their respective owners. This listing of any firm or their logos is not intended to imply any endorsement or direct affiliation with Rolec Services Ltd. and is purely to demonstrate branding opportunities.

© 2023 by Rolec Services Ltd. All rights reserved. EVWD-V02-R6 WallPod Data Sheet





t: 01205 724754

e: enquiries@rolecserv.co.uk