ROLECEV

PRODUCT CATALOGUE

Electric vehicle charging solutions

ROLEC EV

As the desire and demand for greener modes of transport and charging infrastructure increases, Rolec EV remains one of the largest manufacturers and suppliers of EV charging points, with purpose built domestic, commercial and public charging solutions.

Contents

HELPFUL INFORMATION

Types of electric vehicles	4
Types of charging connectors	5
Charging speed comparison	6
AC & DC charging explained	7
Market sectors	8
OZEV grant funding	10

PRODUCTS

QUBEV SMART	14
ZURA	20
WALLPOD	26
SECURICHARGE	30
QUANTUM	34
BASICCHARGE	38
AUTOCHARGE	42
ULTRACHARGE 160	46
Choosing the right EV chargepoint	50
Branding options	52
Options & accessories	54

SOLUTIONS

Chargepoint management	56
Chargepoint operation	60
Data management pricing & plans	62

INSTALLER APP

ROLEC EV CONNECT	64

OUR CUSTOMERS

Case studies	66

Types of electric vehicles

Car Type	Battery	Plug-in	Fuel
Battery Electric Vehicle (BEV) Powered solely by an electric battery which is charged by plugging into an electrical socket. Clean energy producing zero carbon emissions.	✓	✓	
Hybrid Electric Vehicle (HEV) Combination of conventional combustion engine assisted by electrical motor and batteries. All energy still comes from fuel, but generally more economical.	✓		✓
Plug-in Hybrid Electric Vehicle (PHEV) This type of Hybrid has larger batteries and electric motor, and can be plugged-in to charge as well as charging on the move.	✓	✓	✓

Types of charging connectors

AC CHARGING CONNECTORS

Type 1

A five-pin plug, which is common for American & earlier Asian vehicles, it's a single-phase plug and can charge at a speed of up to 7.4kW.

Type 2

A seven-pin plug, typically found on most European and Asian vehicles from 2018 onwards, it's a triple-phase plug, enabling you to charge your car at a speed of up to 22kW at home and up to 43kW at public charging stations.

DC CHARGING CONNECTORS

CCS2

This is an enhanced version of the Type 2 plug, with two additional power contacts for the purposes of rapid charging. It supports AC and DC charging. It allows up to 350kW charging speed.

CHAdeMO

This connector allows high charging capacities as well as bidirectional charging. Currently, Asian car manufacturers are offering EVs with a CHAdeMO plug, allowing charging up to 100kW.

Charging speed comparison

	AC CHARGING			DC CHARGING	
	SLOW Mode 2 / 3	**FAST** Mode 3	**SUPERFAST** Mode 3	**RAPID** Mode 4	**ULTRA FAST** Mode 4
Connector Type	UK 3-Pin Type 1 Type 2	Type 1 Type 2	Type 2	CHAdeMo CCS2	CCS2
Power	2.4 – 3.7kW	7.4kW	11 – 22kW	50 – 100kW	150 – 350kW
Average rate of charge from 10-80%	7 – 11mph	23mph	33mph†	150 – 215mph	320 – 420mph†
Time to charge from 10-80%	24 – 38h 30m	12h	8h 15m†	37 – 70m	25 – 30m†
Typical Application	Home	Home Workplace Shopping Centres Car Parks	Home Workplace Shopping Centres Car Parks Fleets	Workplace Shopping Centres Highways Motorways Fleets	Shopping Centres Highways Motorways Fleets

Charging times based on the Tesla Model Y Long Range Dual Motor 75kWh. Actual charging times may vary

† = Limited by on-board charger, vehicle cannot charge faster

Source: Electric Vehicle Database https://bit.ly/3JPNdMi

AC & DC charging What's the difference?

AC Charging

Alternating Current

Batteries on electric vehicles are powered by DC (Direct Current). An AC charger uses power from the grid which is supplied in AC (Alternating Current), which is then converted to DC by the vehicles on-board charger. Although charging speeds can be limited due to size constraints.

DC Charging

Direct Current

A DC charger supplies power directly to the battery management system (BMS) inside the vehicle, with no on-board charging infrastructure needed inside the vehicle. Higher power can be supplied meaning charging times can be considerably faster.

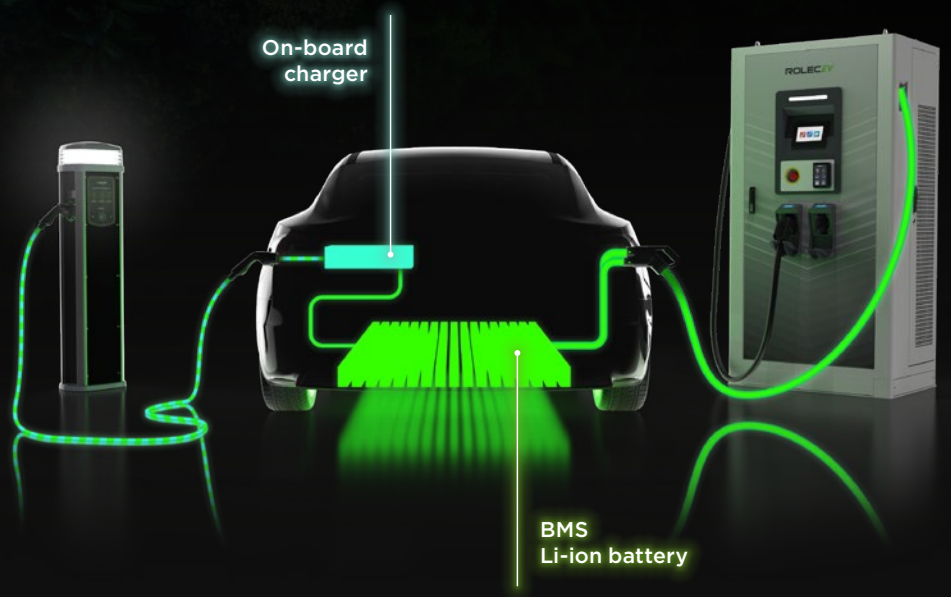

Market sectors

As the UK prepares for a net-zero future, Rolec plays a pivotal role in ensuring that both EV drivers and businesses are equipped for the nation's electrification plans. With over 15 years of experience in the electric vehicle charging industry and over 300,000 public and private chargepoints manufactured and installed, Rolec continues to serve the industry with its innovations in charging hardware and software.

Offering the UK's largest range of AC fast & DC rapid charging points, Rolec customers benefits from cost-effective, quality products that are suited to their requirements. From EV charging solutions for the home, commercial locations, workplaces and fleets, Rolec has the reputation for delivering cost-effective, scalable solutions to suit all requirements.

Homes

HOUSES
FLATS
RENTAL
NEW BUILDS
PRIVATE GARAGES
PARKING SPACES

Did you know that 80% of electric vehicle charging is done at home? That's because charging at home is the most cost effective and convenient way to charge your plug-in vehicle.

Businesses

WORKPLACE
COMMERCIAL
DEVELOPMENT
RESIDENTIAL
DESTINATION
FLEET

By setting chargepoint user tariffs it is easy for businesses recoup their costs from their electric vehicle charging points, whilst also maximising chargepoint return on investment.

Office for Zero Emission Vehicles

GRANT FUNDED EV CHARGEPOINTS

Homes and businesses can benefit from huge savings when purchasing EV chargepoints

From April 2022, the Office for Zero Emissions (OZEV) grant funding schemes for both domestic and workplace charging requirements are changing in order to increase the number of electric vehicle charging points in the UK. So what savings can be made?

EV chargepoint grant for flat owner-occupiers and people living in rented properties

The **EV chargepoint grant for flat owner-occupiers and people living in rented properties** provides funding towards the cost of installing electric vehicle smart chargepoints at domestic properties across the UK. It replaced the Electric Vehicle Homecharge Scheme (EVHS) on 1st April 2022.

Up to

£350*

- Up to 75% of the cost to buy and install a chargepoint, £350 per grant.

Who can claim the grant:

- Homeowners who live in flats.
- People living in rental accommodation (flats and single-use properties).

To be eligible for the grant, you must:

- Have dedicated off-street parking.
- Own, lease or have the use of a qualifying vehicle.
- Not have already claimed the grant (either the EV chargepoint grant or the previous EVHS grant) for your EV.

If you live in Scotland, you may be eligible for an additional grant of up to £300** through the Energy Saving Trust (EST). This is on top of the £350 OZEV grant.

For full details of OZEV grant funding, eligibility and how you can apply, please visit:
www.gov.uk/government/collections/government-grants-for-low-emission-vehicles

* Subject to OZEV Ts & Cs

** Subject to EST Ts & Cs

EV chargepoint grants for landlords, social housing providers & property factors

To assist landlords with providing EV charging to their tenants, the government has developed two OZEV grants. The **EV chargepoint grant for landlords** and the **EV infrastructure grant for residential car parks**. These grants have been designed to save landlords thousands of pounds on infrastructure and installing EV chargers.

EV chargepoint grant for landlords

Up to
£70,000* per year

- Up to 75% of the cost to buy and install an EV chargepoint, limited to £350 per grant.
- Each financial year, landlords can receive up to:
  - 200 grants for residential properties
  - 100 grants for commercial properties

These can be across several properties and installations or for one property.

Who can claim the grant:

- Building owners (including landlords and social housing providers and property factors).
  - single-unit residential properties, such as flats and houses
  - multi-unit residential properties, such as apartment blocks
  - commercially-let units

EV infrastructure grant for residential car parks

Up to
£900,000* per year

- A grant of up to £30,000 per building or estate.
- Limited to 30 grants per financial year.
- You must install infrastructure for a minimum of 5 private off-street parking spaces, with at least one working chargepoint.
- Up to £850 grant funding is available per bay (£500 per parking bay provisioned with charging infrastructure, plus an additional £350 per parking bay with a EV chargepoint).

If more chargepoints are needed in addition to those provided by this grant, then the **EV chargepoint grant for landlords** may be used.

Who can claim the grant:

- Landlords or other entity who rents, leases or manages properties in the UK.
  - multi-unit residential properties, such as apartment blocks

For full details of OZEV grant funding, eligibility and how you can apply, please visit:
www.gov.uk/government/collections/government-grants-for-low-emission-vehicles

* Subject to OZEV Ts & Cs

EV chargepoint grants for businesses, charities and public sector organisations

The UK government has some of the most ambitious targets in the world for reducing carbon emissions and backed them up with substantial grants for electric car charging installations. There are two OZEV grants available to workplaces, the **Workplace Charging Scheme (WCS)** and the **EV infrastructure grant for staff and fleets**.

EV infrastructure grant for staff and fleets

Small to medium business enterprises (SMEs) can also access the **EV infrastructure grant for staff and fleets** alongside the **WCS grant**, helping them install the infrastructure they need for chargepoints, now and in the future. Both grants can be used at the same site, but not for the same charging points.

Up to
£75,000*

- A grant is capped at £15,000 per building, or 75% of installation costs.
- Up to £850 grant funding is available per bay (£500 per parking bay provisioned with charging infrastructure, plus an additional £350 per parking bay with a working EV chargepoint).
- Chargepoints installed must be exclusively for staff or fleet use.
- You must install infrastructure for a minimum of 5 private off-street parking spaces, with at least one chargepoint.
- Businesses can claim up to 5 grants (only one grant per site that the business owns, leases or rents).

Who can claim the grant:

- SMEs with up to 249 employees.

Workplace Charging Scheme (WCS)

Up to
£14,000*

- The grant covers up to 75% of the total cost to purchase and install EV chargepoints.
- Up to £350 is available per socket.
- Max. of 40 sockets across all sites per applicant.
- Chargepoints must be used by staff or fleet only. Except for charities and small accommodation businesses, your guests and visitors may use the chargepoints.

Who can claim the grant:

- Workplaces
- Small accommodation businesses (inc. Hotels, B&Bs, Holiday Lets & Campsites)
- Charities

Please note, if your home is your registered workplace with Companies House or HMRC, you may be eligible for the grant.

For full details of OZEV grant funding, eligibility and how you can apply, please visit:
www.gov.uk/government/collections/government-grants-for-low-emission-vehicles

* Subject to OZEV Ts & Cs

QUBEV SMART

This intelligent, modern yet low-cost unit has been designed to provide electric vehicle drivers with an affordable home charging solution, without compromising on quality.

Paired with the QUBEV Smart app, EV drivers have full control of scheduling charging sessions, solar matching ECO mode and much more. EV drivers can enjoy a seamless charging experience, ensuring their vehicle will be ready for the next electric adventure.

- Universal charging socket or Type 2 tethered lead
- Power rating – Up to 7.4kW or 22kW models
- Adjustable power rating – 10A, 13A, 16A & 32A
- Free QUBEV Smart Wi-Fi app
- Scheduled / off-peak charging
- Solar compatible (single phase models only)
- PEN fault and residual current protection (AC 30mA Type A, DC 6mA)
- Dynamic load balancing (CT clamp(s) & cable(s) included)
- OCPP 1.6 compliant
- Built-in LED charging status indicator
- UK Smart Charge Point Regulations Compliant including tamper security
- Wi-Fi / Ethernet connectivity
- IP54 & IK08 rated
- Corrosion and fire resistant
- CE and UKCA certified
- Easy to install and maintain
- Wall or post mounting options
- OZEV grant fundable
- 3 Year Warranty

UK's **most affordable** home EV charger

Stocked in the UK by ROLEC EV

QUBEV SMART PRODUCT OVERVIEW

Connection Type	Charging Output	Input Supply	Unit Colour	Product Code
Single Phase Units:				
1x Type 2 (IEC 62196) charging socket	Up to 7.4kW (32A)	1x 32A Single Phase 230V AC (±10 %) 50/60Hz	Black	EVON0090
1x Type 2 (IEC 62196) 5m tethered lead*	Up to 7.4kW (32A)	32A Single Phase 230V AC (±10 %) 50/60Hz	Black	EVON0095
1x Type 2 (IEC 62196) charging socket	Up to 22kW (32A)	32A Three Phase 400V AC (±10 %) 50/60Hz	Black	EVON0100
1x Type 2 (IEC 62196) 5m tethered lead*	Up to 22kW (32A)	32A Three Phase 400V AC (±10 %) 50/60Hz	Black	EVON0105

*Tethered cables are approximately 5m total length

Accessories:

Mounting post, fits up to 2 chargers
EVFP0030

QUBEV Smart plate for mounting post
EVFP0050

120A up to 35mm² CT clamp with 5m cable
ACSR0380

QUBEV Smart remote wall mount for Type 2 plug holster
EVRS0040

More accessories on page 54

QUBEV Smart App

The QUBEV Smart app gives you full control of your charger, from scheduling your charging session for when electricity is cheapest, adjusting the power rating, monitoring your energy usage and much more.

Enjoy a seamless charging experience, ensuring your EV will be ready for your next electrified adventure.

- **Choose from charging modes:** Plug & charge, ECO (solar), scheduled
- **View charging state**
- **Solar compatible**
- **Schedule charging**
- **Multi user access**
- **Monitor usage**
- **Full charging history**
- **Fault notifications**
- **Security log & alerts**

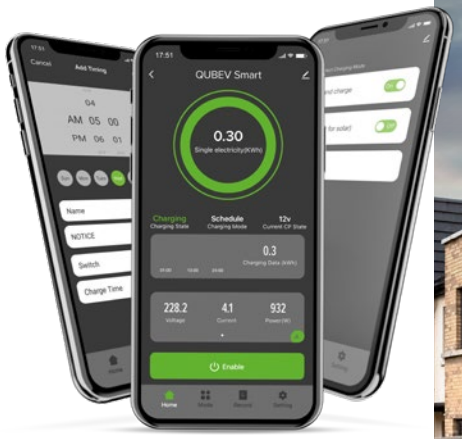

DOWNLOAD THE FREE QUBEV SMART APP

GET IT ON Google Play

Download on the App Store

Chosen by major UK housing developers

Ideal Solution for Part S Regulations

UK Smart Charge Point Regulations Compliant

3 YEAR WARRANTY

FREE Warranty

OZEV

Grant Fundable

ZURA

Sleek, innovative, powerful, Rolec EV's brand new charger, designed and manufactured to suit both commercial and domestic charging requirements. ZURA is complete with never-seen-before customisable aesthetics and is packed with the most-wanted features. Choose from single or dual outlet models. Single outlet units can be upgraded to dual in the future (single phase models only).

- Plug & charge, mobile app or RFID controlled charging
- 1x or 2x universal charging socket(s) or Type 2 tethered lead(s)
- Up to 7.4kW or 22kW charging output(s)
- PME fault detection (no earth rod required)
- Dynamic load balancing (CT clamp & cable included)
- Solar PV, battery storage or domestic wind turbine integration*
- Alexa & Google assistant compatible*
- OCPP 1.6 – can integrate with any app / back office such as; Monta, VENDELECTRIC, ev.energy, Electric Miles, Fuuse etc.
- Over-the-air firmware / software updates
- AC 30mA Type A & DC 6mA protection**
- Dual tamper and breach security notification
- Cable lock security feature (can be permanently locked by user)
- MID-approved energy metering
- 4G / Wi-Fi / Ethernet connectivity
- IK10 impact resistant design
- Independent back plate for easy wall or post mounting
- OZEV grant fundable
- Designed & manufactured in the UK
- 3 Year Warranty

*App dependent features

**DC 6mA protection for single outlet models

Manufactured in the UK

ZURA PRODUCT OVERVIEW

Connection Type	Charging Output	Input Supply	Fascia Colour	Product Code
Single Phase Units:				
1x Type 2 (IEC 62196) charging socket	Up to 7.4kW (32A)	1x 32A Single Phase 230V AC (±10 %) 50/60Hzw	Black	ROLEC3020B
2x Type 2 (IEC 62196) charging sockets	Up to 7.4kW (32A) per socket	1x 63A Single Phase 230V AC (±10 %) 50/60Hz	Black	ROLEC3030B
1x Type 2 (IEC 62196) 5m tethered lead	Up to 7.4kW (32A)	1x 32A Single Phase 230V AC (±10 %) 50/60Hzw	Black	ROLEC3140B
2x Type 2 (IEC 62196) 5m tethered leads	Up to 7.4kW (32A) per tethered lead	1x 63A Single Phase 230V AC (±10 %) 50/60Hz	Black	ROLEC3150B
1x Type 2 (IEC 62196) 10m tethered lead	Up to 7.4kW (32A)	1x 32A Single Phase 230V AC (±10 %) 50/60Hzw	Black	ROLEC3145B
2x Type 2 (IEC 62196) 10m tethered leads	Up to 7.4kW (32A) per tethered lead	1x 63A Single Phase 230V AC (±10 %) 50/60Hz	Black	ROLEC3155B
Three Phase Units:				
1x Type 2 (IEC 62196) charging socket	Up to 22kW (32A)	1x 32A Three Phase 400V AC (±10 %) 50/60Hz	Black	ROLEC3046B
1x Type 2 (IEC 62196) 5m tethered lead	Up to 22kW (32A)	1x 32A Three Phase 400V AC (±10 %) 50/60Hz	Black	ROLEC3156B

Personalise your Zura chargepoint

For those interested in customisation or aesthetics, this is the perfect solution for you. Whether it's your company branding, favourite place, colour or an image of your pet, the choice is entirely yours. Contact Rolec for more details.

Customisable fascias for both

HOMES *AND* BUSINESSES

Accessories:

Mounting post, fits up to 2 chargers
EVFP0030

20A Single phase EV consumer unit with Type A RCBO
EVIN0010

40A Single phase EV consumer unit with Type A RCBO
EVIN0015

20A Three phase EV consumer unit with Type A RCBO
EVIN0070

40A Three phase EV consumer unit with Type A RCBO
EVIN0075

80A Single phase EV consumer unit with Type A RCD
EVIN3010

80A Single phase EV consumer unit with Type A RCD / MCB
EVIN3020

Zura front fascia plate – Grey
ZURA0100G

Zura front fascia plate – White
ZURA0100W

More accessories on page 54

Brand names, logos and trademarks used herein remain the property of their respective owners. This listing of any firm or their logos is not intended to imply any endorsement or direct affiliation with Rolec Services Ltd. and is purely to demonstrate branding opportunities.

WALLPOD

Fitted with the latest smart technology, this charging unit allows the everyday EV driver to embark on their electrified, sustainable adventures all within the tap of a finger. If you're looking for a charger for your home or business that's affordable and easy to use, this may be the perfect solution for you.

- Plug & charge, mobile app or RFID controlled charging
- Universal charging socket or Type 2 tethered lead
- Up to 7.4kW charging output
- PME fault detection (no earth rod required)
- Dynamic load balancing (CT clamp & cable included)
- Solar PV, battery storage or domestic wind turbine integration*
- Alexa & Google assistant compatible*
- OCPP 1.6 – can integrate with any app / back office such as; Monta, VENDELECTRIC, ev.energy, Electric Miles, Fuuse etc.
- Over-the-air firmware / software updates
- Built-in 6mA DC leakage protection
- Dual tamper and breach security notification
- Cable lock security feature (can be permanently locked by user)
- MID-approved energy metering
- 4G / Wi-Fi / Ethernet connectivity
- IK10 impact resistant design
- Wall or post mounted
- OZEV grant fundable
- Designed & manufactured in the UK
- 3 Year Warranty

*App dependent features

Manufactured in the UK

WALLPOD PRODUCT OVERVIEW

Connection Type	Charging Output	Input Supply	Unit Colour	Product Code
Single Phase Units:				
1x Type 2 (IEC 62196) charging socket	Up to 7.4kW (32A)	1x 32A Single Phase 230V AC (±10 %) 50/60Hz	Grey	ROLEC4020G
			White	ROLEC4020W
			Black	ROLEC4020B
1x Type 2 (IEC 62196) 5m tethered lead	Up to 7.4kW (32A)	1x 32A Single Phase 230V AC (±10 %) 50/60Hz	Grey	ROLEC4140G
			White	ROLEC4140W
			Black	ROLEC4140B
1x Type 2 (IEC 62196) 10m tethered lead	Up to 7.4kW (32A)	1x 32A Single Phase 230V AC (±10 %) 50/60Hz	Grey	ROLEC4145G
			White	ROLEC4145W
			Black	ROLEC4145B

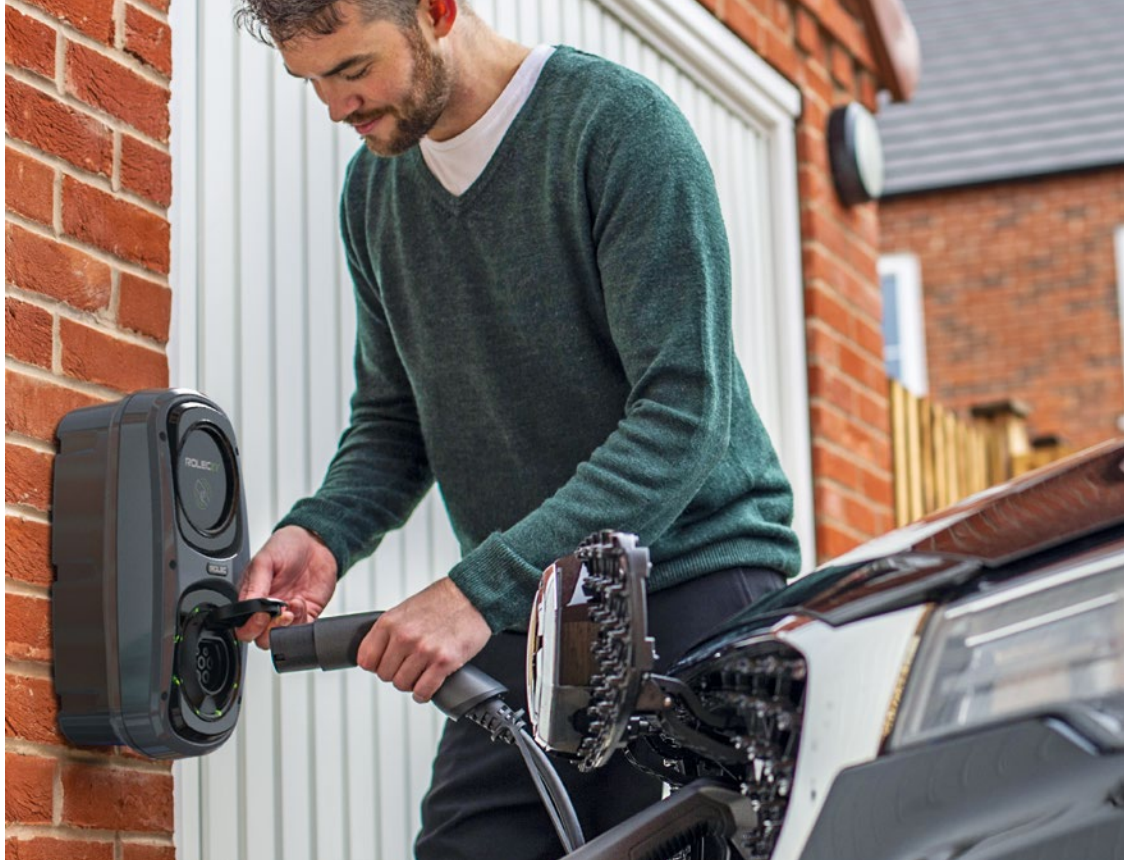

Accessories:

Mounting post, fits up to 2 chargers
EVFP0030

20A Single phase EV consumer unit with a Type A RCBO
EVIN0010

40A Single phase EV consumer unit with a Type A RCBO
EVIN0015

More accessories on page 54

SECURICHARGE

The ideal chargepoint for any workplace environment with its heavy-duty and vandal-resistant features.

This wall-mounted unit is a robust charging solution; it is also a space-saving alternative to a charging pedestal. A popular choice for exposed or enclosed locations, the SECURICHARGE is designed to provide a long-lasting charging solution for the future of electrified transport.

- Plug & charge, mobile app or RFID controlled charging
- Choose from 1x or 2x universal charging socket(s)
- Up to 7.4kW or 22kW charging output(s)
- Supports dynamic load balancing & static load management
- OCPP 1.6 – can integrate with any app / back office such as; Monta, VENDELECTRIC, Fuuse, ChargePlace Scotland etc.
- Over-the-air firmware / software updates
- Built-in AC overload & fault current protection (RCBO)
- Built-in 6mA DC leakage protection
- Dual tamper and breach security notification
- Cable lock security feature (can be permanently locked)
- MID-approved energy metering
- 4G / Wi-Fi / Ethernet connectivity
- IK10 impact resistant design
- Wall mounted
- OZEV grant fundable
- Designed & manufactured in the UK
- 3 Year Warranty

Manufactured in the UK

SECURICHARGE PRODUCT OVERVIEW

Connection Type	Charging Output	Input Supply	Unit Colour	Product Code
Single Phase Units:				
1x Type 2 (IEC 62196) charging socket	Up to 7.4kW (32A)	1x 32A Single Phase 230V AC (±10 %) 50/60Hz	● Black	ROLEC0111B
			● Grey	ROLEC0111G
			○ White	ROLEC0111W
2x Type 2 (IEC 62196) charging sockets	Up to 7.4kW (32A) per socket	1x 63A Single Phase 230V AC (±10 %) 50/60Hz	● Black	ROLEC0121B
			● Grey	ROLEC0121G
			○ White	ROLEC0121W
Three Phase Units:				
1x Type 2 (IEC 62196) charging socket	Up to 22kW (32A)	1x 32A Three Phase 400V AC (±10 %) 50/60Hz	● Black	ROLEC0113B
			● Grey	ROLEC0113G
			○ White	ROLEC0113W
2x Type 2 (IEC 62196) charging sockets	Up to 22kW (32A) per socket	1x 63A Three Phase 400V AC (±10 %) 50/60Hz	● Black	ROLEC0123B
			● Grey	ROLEC0123G
			○ White	ROLEC0123W

QUANTUM

A modern solution for all workplace charging requirements. Sleek, durable, and easy-to-use, this charging pedestal is the perfect option for workplaces seeking to offer charging facilities for both employees and public use.

Popular for its LED features, the louvered amenity lighting and status indicator socket halos provide enhanced visibility of the charging bays and surrounding areas.

- Plug & charge, mobile app or RFID controlled charging
- Choose from 1x, 2x or 4x universal charging socket(s)
- Up to 7.4kW or 22kW charging output(s)
- Supports dynamic load balancing & static load management
- OCPP 1.6 – can integrate with any app / back office such as; Monta, VENDELECTRIC, Fuuse, ChargePlace Scotland etc.
- Over-the-air firmware / software updates
- Built-in AC overload & fault current protection (RCBO)
- Built-in 6mA DC leakage protection
- Dual tamper and breach security notification
- Cable lock security feature (can be permanently locked by user)
- LED amenity lighting head (Photocell controlled)
- MID-approved energy metering
- 4G / Wi-Fi / Ethernet connectivity
- IK10 impact resistant design
- Surface or root mountable
- OZEV grant fundable
- Designed & manufactured in the UK
- 3 Year Warranty

Manufactured in the UK

QUANTUM PRODUCT OVERVIEW

Connection Type	Charging Output	Input Supply	Unit Colour	Product Code
Single Phase Units:				
1x Type 2 (IEC 62196) charging socket	Up to 7.4kW (32A)	1x 32A Single Phase 230V AC (±10 %) 50/60Hz	● Black	ROLEC0411B
			● Grey	ROLEC0411G
			○ White	ROLEC0411W
2x Type 2 (IEC 62196) charging sockets	Up to 7.4kW (32A) per socket	1x 63A Single Phase 230V AC (±10 %) 50/60Hz	● Black	ROLEC0421B
			● Grey	ROLEC0421G
			○ White	ROLEC0421W
4x Type 2 (IEC 62196) charging sockets	Up to 7.4kW (32A) per socket	2x 63A Single Phase 230V AC (±10 %) 50/60Hz	● Black	ROLEC0425B
			● Grey	ROLEC0425G
			○ White	ROLEC0425W
Three Phase Units:				
1x Type 2 (IEC 62196) charging socket	Up to 22kW (32A)	1x 32A Three Phase 400V AC (±10 %) 50/60Hz	● Black	ROLEC0413B
			● Grey	ROLEC0413G
			○ White	ROLEC0413W
2x Type 2 (IEC 62196) charging sockets	Up to 22kW (32A) per socket	1x 63A Three Phase 400V AC (±10 %) 50/60Hz	● Black	ROLEC0423B
			● Grey	ROLEC0423G
			○ White	ROLEC0423W

Accessories:

Ground mounting base for Quantum pedestal
GMQR0010

Root mount protection barrier – 48mm
EVCB0020

Surface mount protection barrier – 48mm
EVCB0040

More accessories on page 54

BASICCHARGE

This simplistic and affordable EV charging pedestal has integrated LED amenity lighting which provides greater visibility of the charging bays and surrounding areas.

This charger offers an effortless charging experience for EV drivers whilst providing a cost-effective solution for businesses. Ideal for car parks, workplaces, development sites and public locations.

- Plug & charge, mobile app or RFID controlled charging
- Choose from 1x or 2x universal charging socket(s)
- Up to 7.4kW or 22kW charging output(s)
- Supports dynamic load balancing & static load management
- OCPP 1.6 – can integrate with any app / back office such as; Monta, VENDELECTRIC, ev.energy, Electric Miles, Fuuse etc.
- Over-the-air firmware / software updates
- Built-in AC overload & fault current protection (RCBO)
- Built-in 6mA DC leakage protection
- Dual tamper and breach security notification
- Cable lock security feature (can be permanently locked by user)
- LED amenity lighting head (Photocell controlled)
- MID-approved energy metering
- 4G / Wi-Fi / Ethernet connectivity
- IK10 impact resistant design
- Surface or root mountable
- OZEV grant fundable
- Designed & manufactured in the UK
- 3 Year Warranty

Manufactured in the UK

BASICCHARGE PRODUCT OVERVIEW

Connection Type	Charging Output	Input Supply	Unit Colour	Product Code
Single Phase Units:				
1x Type 2 (IEC 62196) charging socket	Up to 7.4kW (32A)	1x 32A Single Phase 230V AC (±10 %) 50/60Hz	● Black	ROLEC0211B
			● Grey	ROLEC0211G
			○ White	ROLEC0211W
2x Type 2 (IEC 62196) charging sockets	Up to 7.4kW (32A) per socket	1x 63A Single Phase 230V AC (±10 %) 50/60Hz	● Black	ROLEC0221B
			● Grey	ROLEC0221G
			○ White	ROLEC0221W
Three Phase Units:				
1x Type 2 (IEC 62196) charging socket	Up to 22kW (32A)	1x 32A Three Phase 400V AC (±10 %) 50/60Hz	● Black	ROLEC0213B
			● Grey	ROLEC0213G
			○ White	ROLEC0213W
2x Type 2 (IEC 62196) charging sockets	Up to 22kW (32A) per socket	1x 63A Three Phase 400V AC (±10 %) 50/60Hz	● Black	ROLEC0223B
			● Grey	ROLEC0223G
			○ White	ROLEC0223W

Accessories:

Ground mounting base for BasicCharge pedestal
GMCP0010

Root mount protection barrier – 48mm
EVCB0020

Surface mount protection barrier – 48mm
EVCB0040

More accessories on page 54

AUTOCHARGE

A robust and hard-wearing pedestal that has been specifically designed and manufactured for both commercial and public facing environments. Ideal for development sites, workplaces, and car parks! This versatile, future-proof pedestal is compatible with all EVs/ PHEVs on the current market and is capable of charging up to 22kW.

- Plug & charge, mobile app or RFID controlled charging
- Choose from 1x or 2x universal charging socket(s)
- Up to 7.4kW or 22kW charging output(s)
- Supports dynamic load balancing & static load management
- OCPP 1.6 – can integrate with any app / back office such as; Monta, VENDELECTRIC, Fuuse, ChargePlace Scotland etc.
- Over-the-air firmware / software updates
- Built-in AC overload & fault current protection (RCBO)
- Built-in 6mA DC leakage protection
- Dual tamper and breach security notification
- Switchgear & components behind lockable door
- Cable lock security feature (can be permanently locked by user)
- MID-approved energy metering
- 4G / Wi-Fi / Ethernet connectivity
- IK10 impact resistant design
- Surface or root mountable
- OZEV grant fundable
- Designed & manufactured in the UK
- 3 Year Warranty

Manufactured in the UK

AUTOCHARGE PRODUCT OVERVIEW

Connection Type	Charging Output	Input Supply	Unit Colour	Product Code
Single Phase Units:				
1x Type 2 (IEC 62196) charging socket	Up to 7.4kW (32A)	1x 32A Single Phase 230V AC (±10 %) 50/60Hz	● Black	ROLEC0011B
			● Grey	ROLEC0011G
			○ White	ROLEC0011W
2x Type 2 (IEC 62196) charging sockets	Up to 7.4kW (32A) per socket	1x 63A Single Phase 230V AC (±10 %) 50/60Hz	● Black	ROLEC0021B
			● Grey	ROLEC0021G
			○ White	ROLEC0021W
Three Phase Units:				
1x Type 2 (IEC 62196) charging socket	Up to 22kW (32A)	1x 32A Three Phase 400V AC (±10 %) 50/60Hz	● Black	ROLEC0013B
			● Grey	ROLEC0013G
			○ White	ROLEC0013W
2x Type 2 (IEC 62196) charging sockets	Up to 22kW (32A) per socket	1x 63A Three Phase 400V AC (±10 %) 50/60Hz	● Black	ROLEC0023B
			● Grey	ROLEC0023G
			○ White	ROLEC0023W

Accessories:

Ground mounting base for AutoCharge pedestal
GMPG0010

Root mount protection barrier – 48mm
EVCB0020

Surface mount protection barrier – 48mm
EVCB0040

More accessories on page 54

ULTRACHARGE 160

An intelligent modular and scalable DC rapid charger that can be upgraded in modules of 20kW, up to 160kW. A cost-effective solution for public, fleet and highway infrastructure deployment.

With four standard power configurations; 60kW, 80kW, 120kW or 160kW, its dynamic power balancing feature enables two vehicles to charge simultaneously. Conforms to the ISO 15118 Plug & Charge standard.

- Plug & charge, app, RFID or contactless payment controlled charging
- Offer up to 2x DC charging outputs
- Up to 160kW charging speeds
  (CHAdeMO up to 62.5kW | CCS2 up to 160kW)
- Upgradeable power modules
- OCPP 1.6 – can integrate with any app / back office such as; Monta, VENDELECTRIC, Fuuse, ChargePlace Scotland etc.
- Over-the-air firmware / software updates
- Intelligent dynamic power sharing
- Supports static load management
- 7" HD user interface touch screen
- Integrated RFID / NFC / contactless card payment terminal
- 4G / Ethernet connectivity
- 96% Peak efficiency
- Ultrawide constant power output voltage range 300V – 1000V
- Under/overvoltage, DC overcurrent, over-temp & surge protection
- 5m charging cables (4.5m external)
- Emergency stop
- IP55, IK10 protection rating

Stocked in the UK by ROLECEV

ULTRACHARGE 160 PRODUCT OVERVIEW

Station Level	Number of Connections	Power Allocation	Input Current	Input Power	Product Code
60kW DC	1x CCS2 1x CHAdeMO	1x 60kW 1x 40kW / 1x20kW*	112A	67kVA	EVDC2010
80kW DC	2x CCS2	1x 80kW 2x 40kW*	150A	89kVA	EVDC2020
120kW DC	2x CCS2	1x 120kW 2x 60kW*	224A	133kVA	EVDC2030
160kW DC	2x CCS2	1x 160kW 2x 80kW*	299A	177kVA	EVDC2040

*When 2 vehicles are charging simultaneously

Accessories:

Ground mounting base for AutoCharge pedestal
GMPG0010

Root mount protection barrier – 48mm
EVCB0020

Surface mount protection barrier – 48mm
EVCB0040

Branding & colour options available
Contact Rolec for details

20kW power upgrade modules
Contact Rolec for details

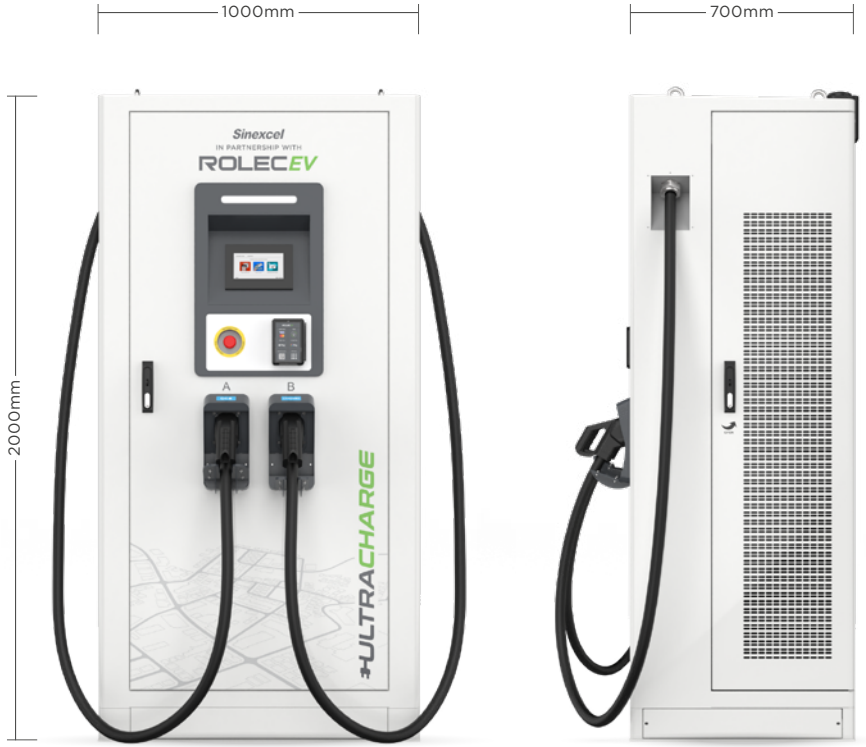

Choosing the right EV chargepoint

		HOMES				BUSINESSES						
		QUBEV SMART	ZURA	WALLPOD	BASICCHARGE	ZURA	WALLPOD	SECURICHARGE	QUANTUM	BASICCHARGE	AUTOCHARGE	ULTRACHARGE 160
Charging Type	AC / DC charging	AC	AC	AC	AC	AC	AC	AC	AC	AC	AC	DC
User Interface	Plug & charge	●	●	●	●	●	●	●	●	●	●	●
	Mobile app controlled	●	●	●	●	●	●	●	●	●	●	●
	RFID controlled		●	●	●	●	●	●	●	●	●	●
	Contactless payment terminal											●
Operator Interface	Back-office managed					●	●	●	●	●	●	●
Charging Speeds	Up to 7.4kW (single phase)	●	●	●	●	●	●	●	●	●	●	
	Up to 22kW (three phase)	●	●		●	●	●	●	●	●	●	
	Up to 160kW (three phase)											●
Connections	Type 2 tethered lead (AC)	1x	1 | 2x	1x		1 | 2x	1x					
	Universal charging socket (AC)	1x	1 | 2x	1x	1 | 2x	1 | 2x	1x	1 | 2x	1 | 2 | 4x	1 | 2x	1 | 2x	
	CCS2 tethered lead (DC)											1 | 2x
	CHAdeMO tethered lead (DC)											0 | 1x
Protection	PME fault detection	●	●	●	●	●	●	●	●	●	●	
	Built-in AC 30mA Type A protection	●		●*	●	●	●	●	●	●	●	●
	Built-in DC 6mA protection	●	●	●	●	●	●	●	●	●	●	●
	Built-in overload protection				●	●	●	●	●	●	●	●
	Supports dynamic load balancing & static load management	●	●	●	●	●	●	●	●	●	●	●
	Tamper and breach security notification	●	●	●	●	●	●	●	●	●	●	
Unit Features	Solar PV, battery storage or wind turbine integration (app dependent)	●	●	●	●	●	●	●	●	●	●	●
	Alexa & Google assistant compatible (app dependent)		●	●	●							
	Cable lock security feature (app dependent)		●	●	●	●	●	●	●	●	●	
	Amenity lighting				●				●	●		
Energy Monitoring	MID-approved energy metering		●	●	●	●	●	●	●	●	●	
Installation	Wall mounted	●	●	●		●	●	●				
	Post mounted	●	●	●		●	●					
	Surface / root mounted				●				●	●	●	●
OZEV Grant Fundable	EV Chargepoint Grant	●	●	●	●	●	●	●	●	●	●	
	Workplace Charging Scheme					●	●	●	●	●	●	
Buyer Protection	Manufacturers warranty (extended warranty available upon request)	3	3	3	3	3	3	3	3	3	3	2

*Dual outlet models only

BRANDING OPTIONS

Rolec EV understands the importance of brand identity, so that's why we offer our clients the ability to customise their chargepoints to suit their brand guidelines, offering a completely unique aesthetic.

From a simple logo through to a fully bespoke branding, Rolec EV take great pride in providing a solution that distinguishes businesses' chargepoints from their competitors'.

Brand names, logos and trademarks used herein remain the property of their respective owners. This listing of any firm or their logos is not intended to imply any endorsement or direct affiliation with Rolec Services Ltd. and is purely to demonstrate branding opportunities.

OPTIONS & ACCESSORIES

Rolec EV holds the UK's largest stock of electric vehicle charging cables and accessories. All of which are available from your local electrical wholesaler. Due to our on-site warehousing facilities, we're usually able to dispatch accessories within 24 hours.

GMQR0010

ACSR0125

RFID0010/20

EVCB0040

EVPS0010

ZURA0100B/G/W

EVIN0010/70

EVFP0030

EVPP0100

Item Description	Product Code
RFID card	RFID0010
RFID fob	RFID0020
WallPod galvanised steel mounting post – 1350mm	EVFP0010
Zura / WallPod / QUBEV Smart mounting post | fits up to 2 chargers	EVFP0030
QUBEV Smart plate for mounting post	EVFP0050
Ground mounting base for Quantum pedestal	GMQR0010
Ground mounting base for BasicCharge pedestal	GMCP0010
Ground mounting base for AutoCharge pedestal	GMPG0010
Protection barrier – root mount (48mm)	EVCB0020
Protection barrier – surface mount (48mm)	EVCB0040
EV parking sign – A3 landscape	EVPS0030
EV parking sign – A4 landscape	EVPS0010
EV parking sign – A5 landscape	EVPS0020
5m 32A Type 2 to Type 2 charging cable	EVPP0100
10m 32A Type 2 to Type 2 charging cable	EVPP0107
5m 32A Three phase Type 2 to Type 2 charging cable	EVPP0105
10m 32A Three phase Type 2 to Type 2 charging cable	EVPP0108
(Other cables are available, including Type 1 options)	
Remote wall mount for Type 2 plug holster	EVRS0030
QUBEV Smart remote wall mount for Type 2 plug holster	EVRS0040
20A Single phase EV consumer unit with Type A RCBO	EVIN0010
40A Single phase EV consumer unit with Type A RCBO	EVIN0015
20A Three phase EV consumer unit with Type A RCBO	EVIN0070
40A Three phase EV consumer unit with Type A RCBO	EVIN0075
80A Single phase EV consumer unit with Type A RCD	EVIN3010
80A Single phase EV consumer unit with Type A RCD / MCB	EVIN3020
100A up to 35mm² screened CT clamp with 10m cable	ACSR0125
120A up to 35mm² QUBEV Smart CT clamp with 5m cable	ACSR0380
Zura front fascia plate – Black	ZURA0100B
Zura front fascia plate – Grey	ZURA0100G
Zura front fascia plate – White	ZURA0100W
ChargeCheck EV charging unit tester with adapter cable and carry bag	EVTU0018

Chargepoint management

ROLEC EV
Powered by
MONTA

MONTA

EV charging solution for businesses

Monta's chargepoint management platform provides businesses and organisations with the ability to deploy and self-manage their very own electric vehicle charging network. Ideal for workplace, fleet, commercial and residential locations.

- Full & automated control of your chargepoints
- Unlock additional revenue streams
- Set chargepoints for public and/or private use
- Set different pricing for individual chargepoints & groups
- Dynamic pricing allows operators to set pricing in line with their hour-by-hour energy cost
- Fully scalable solution; add or remove chargepoints & users
- Complete fleet management solutions with analytical feedback & reporting
- Reduce charging costs and CO_2 with Smart Charge feature
- Vehicle integration provides visibility of battery size, SOC, percentage & location etc.
- Automatically reimburse employees' home charging
- Smart queuing system that sends notifications to drivers when they become available
- Over-the-air updates and self-healing algorithms ensure charger stability & availability
- Static, Dynamic or True Dynamic load balancing options
- EV Roaming feature, allowing chargepoints to be available on other apps

Other preferred back-office partners:

VendElectric
Fuuse
ChargePlace Scotland
electric vehicle charging

World-class back office software for chargepoint owners

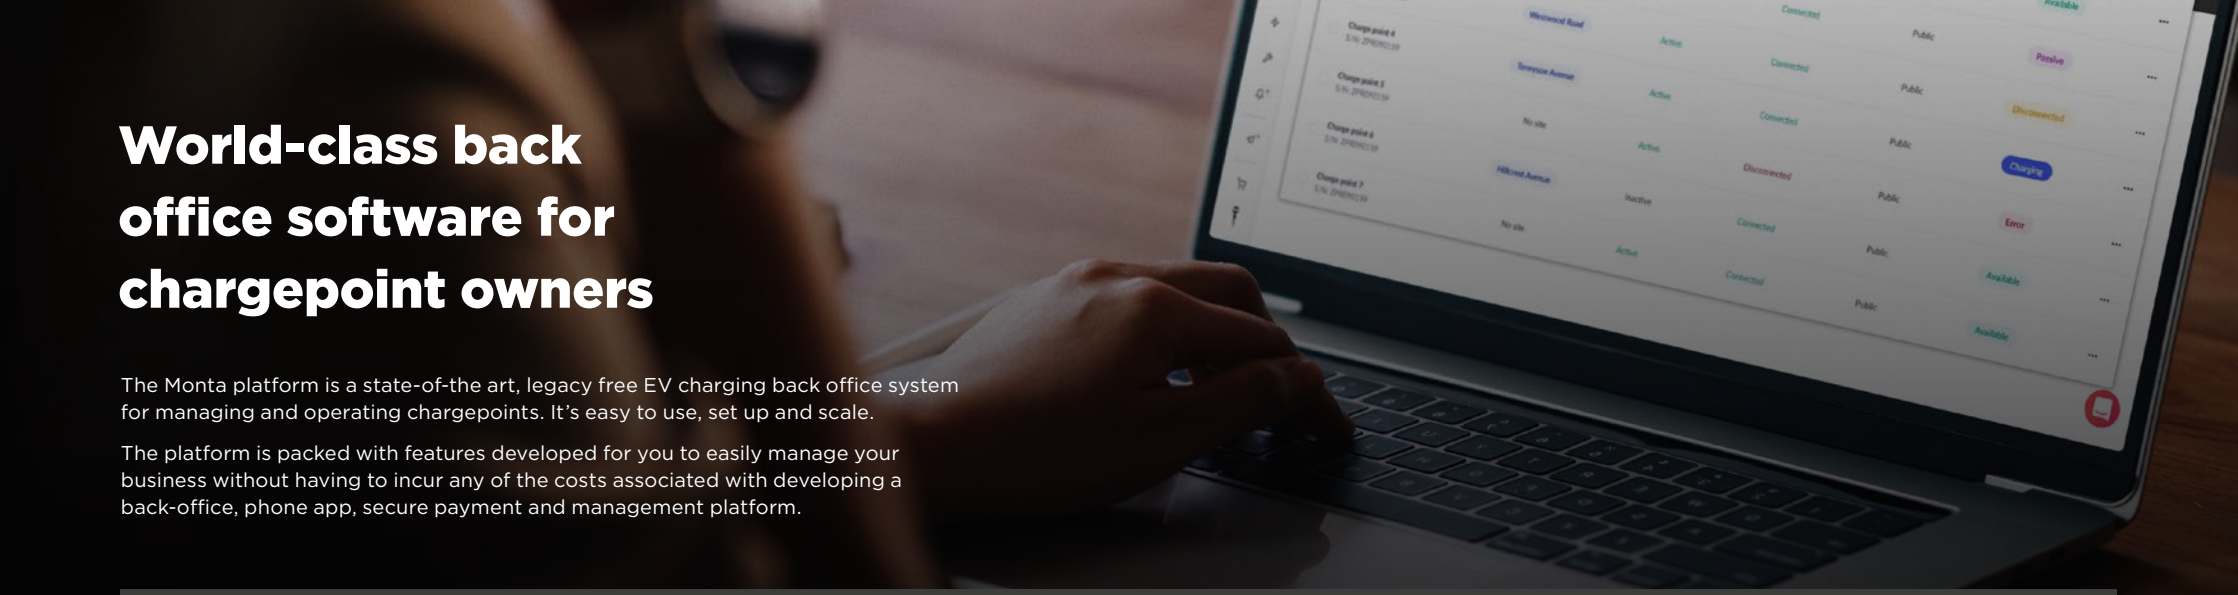

The Monta platform is a state-of-the art, legacy free EV charging back office system for managing and operating chargepoints. It's easy to use, set up and scale.

The platform is packed with features developed for you to easily manage your business without having to incur any of the costs associated with developing a back-office, phone app, secure payment and management platform.

Set different pricing

Manage chargepoints on an individual level and decide pricing for different groups.

Payment options

Pay with Google Pay, Apple Pay, credit card, team wallet or charge key.

Scheduled pricing

Schedule price changes that automatically occur at specific hours. This helps avoid losing money when electricity is expensive.

Member fees

Apply a monthly fee to be part of a team. Each member must pay this, in order to charge at the team's price.

Public & private

Reserve chargepoints for members during peak hours. Open chargepoints to the public off peak hours.

EV Roaming

Chargepoints connected to Monta are available on many other EV charging apps. Attract more drivers by being available where EV drivers are.

Charge on the road

Get access to more than 300,000 publicly available chargepoints and pay with your preferred payment option.

Smart charging

Set chargepoint to only charge at times when conditions are met, such as low electricity price, low CO_2, or high amount of renewable energy.

Smart queue

An intelligent system that distributes EVs between chargepoints when they become available. Once it's your turn you get a notification.

Chargepoint customisation

Customise your chargepoint settings to suit your needs; choosing who can access the chargepoints, and at what price.

Scalable solution

Add or remove chargepoints and users through our platform. You can scale up and down as you please.

Load balancing

Static, Dynamic or True Dynamic options to distribute the electricity in a smart way. No need to buy expensive extra ampere.

Smart booking

Reserve a chargepoint to make sure you're not driving to occupied chargepoints. Once a chargepoint is reserved, only you can start it.

Self-healing algorithms

Self-healing algorithms ensure charger stability and availability. Self-healing automatically fixes CP bugs and errors.

Scheduled access

Reserve chargepoints for members during peak hours. Open chargepoints to the public off peak hours.

Sponsored chargepoint

Employees can charge at home on their company account, thereby avoiding the need to receive money on slow intervals.

Car integration

Allows operators to set their kWh price based on the hour-by-hour price that they're paying for electricity, and not on a statistic number.

Dynamic pricing

Allows operators to set their kWh price based on the hour-by-hour price that they're paying for electricity, and not on a statistic number.

Chargepoint operation

ROLECEV
Powered by
MONTA

MONTA

EV charging solution for EV drivers

Charge your EV on your terms. With Monta you have full control over your charging experience, at home or on the road.

- Easily locate and navigate using the chargepoint map
- Remotely control your home EV charging
- Choose your ready time and choose to prioritise lower costs, lower CO_2 or only using renewable energy
- Schedule charges so your car is ready when you are
- Integrate with most EV manufacturer apps and cars
- Real-time information on your car and battery levels to maximize your charging experience
- Share and give charging access to friends, family and guests
- Set your home charger for public use with custom pricing
- Access to over 300,000 public chargepoints across Europe
- Easily initiate charging and complete payments via credit card, Apple Pay, Google Pay or Monta Wallet
- Online chat or support line for help when you need it most

RFID

Great for quick activation, RFID cards or key fobs are easily accessible and add for a much simpler charging experience, which can also be used alongside the mobile app.

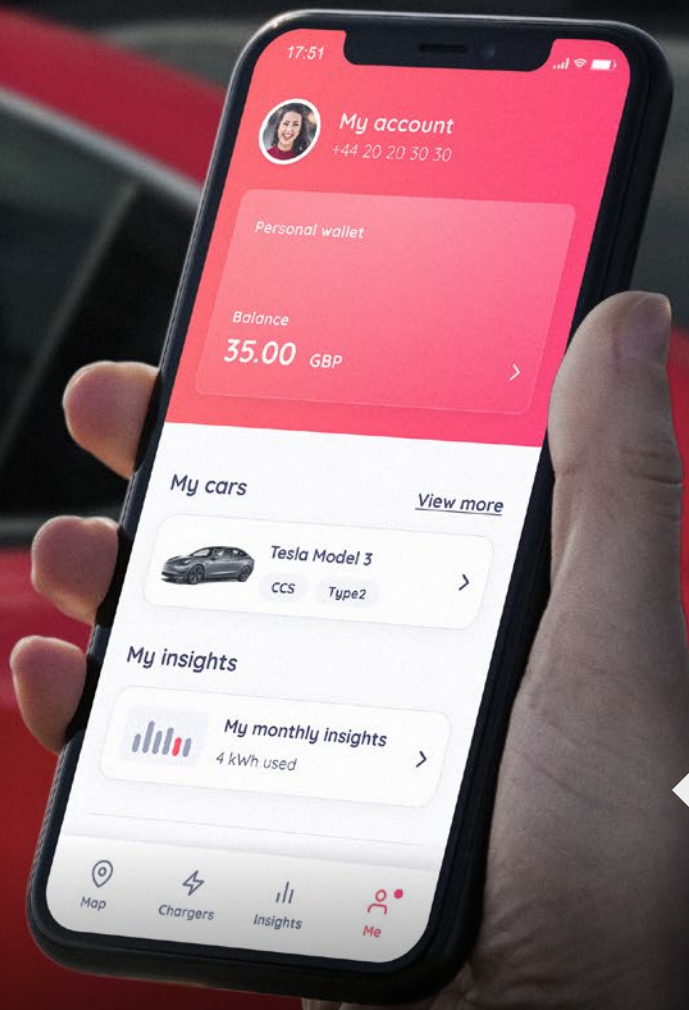

Other preferred mobile app partners:

VendElectric
Fuuse
ChargePlace Scotland electric vehicle charging
ev.energy

DOWNLOAD THE FREE MONTA APP

GET IT ON Google Play
Download on the App Store

www.monta.com/uk/home-charging

Transparent & flexible pricing

Monta is the software you need to get the most out of your chargepoints. Get started for free with up to 3 chargepoints or manage thousands via our web portal.

Basic	Enterprise
Ideal for small businesses and homes. **Max. 3 chargepoints**	Best for medium to large scale charging across multiple sites and the full user experience.
FREE No monthly subscription	**£4.50** Per socket, per month
4.5% Transaction fee* **Unlimited team members**	**4.5% transaction fee*** **Unlimited team members**

*Transaction fee when people pay to charge on your chargepoint (ex. VAT)

	Basic	Enterprise
Email & chat support [1]	✓	✓
Tech support (phone) [1]		✓
24/7 support [1]		✓
Portal	✓	✓
Dashboard		✓
Transaction overview		✓
Smart queue [2]		✓
Load balancing [3]		✓
Advanced team features [4]		✓
Pay with Team Wallet [5]		✓
Team charge keys		✓
Pay by invoice		✓
Sponsored chargepoint [6]		✓
Roaming [7]		✓
Enterprise security [8]		✓

If connected via Ethernet or Wi-Fi no cellular data fees will apply

1. Only for admin / owners of teams / operators
2. This Smart queue feature enables EV drivers to join the virtual queue at one of multiple charging sites and allows drivers to get notified when the chargepoint becomes available for them
3. Load balancing is the distribution of power between the different points of consumption. In other words, Monta automatically divides the available power over the vehicles that are charging
4. Member fees, select chargepoints access
5. In your teams wallet you can see the transactions from and to the wallet and export the list of all the transactions
6. Relevant for companies reimbursing its employees for charging at home
7. Share your chargepoints on the world's largest roaming platform Hubject – 12.5% transaction fee
8. Enterprise security features: audit log, ip whitelist, 2factor / saml

Pricing examples

Unit Type	Description	Qty	Price	Total
Basic Package:				
1way charging unit	Basic package subscription (per socket, per month)	1	FREE	FREE
	Cellular data plan (per socket, per month)	1	£1.20	£1.20
			Sub Total	**£1.20** per month
2way charging unit	Basic package subscription (per socket, per month)	2	FREE	FREE
	Cellular data plan (per socket, per month)	2	£1.20	£2.40
			Sub Total	**£2.40** per month
Enterprise Package:				
1way charging unit	Enterprise package subscription (per socket, per month)	1	£4.50	£4.50
	Cellular data plan (per socket, per month)	1	£1.20	£1.20
			Sub Total	**£5.70** per month
2way charging unit	Enterprise package subscription (per socket, per month)	2	£4.50	£4.50
	Cellular data plan (per socket, per month)	2	£1.20	£2.40
			Sub Total	**£11.40** per month
4way charging unit	Enterprise package subscription (per socket, per month)	4	£4.50	£18.00
	Cellular data plan (per socket, per month)	4	£1.20	£4.80
			Sub Total	**£22.80** per month

ROLEC*EV*

Connect

We understand that configuring our EV range of chargers may be slightly different than before, which is why we've created a step-by-step configuration guide to help you get started. Whether you're a seasoned pro or new to installing Rolec EV chargepoints, this information is crucial for an easy setup.

Download the free Rolec EV Connect app and KEEP the QR code tag attached to the socket.

Scan the QR code now to watch the video on how to get up and running smoothly.

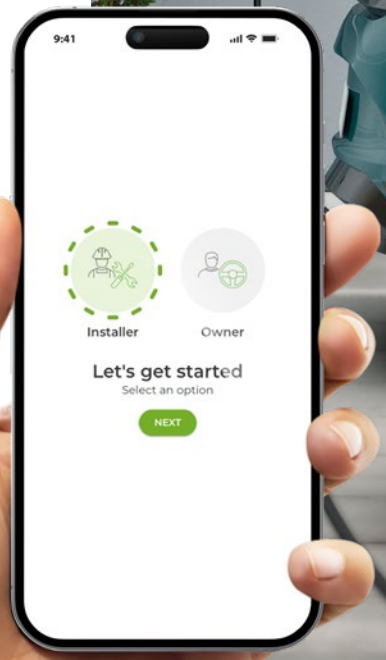

Download the FREE
Rolec EV Connect app

GET IT ON Google Play

Download on the App Store

TO BEGIN CHARGEPOINT CONFIGURATION, INSTALL THE ROLEC EV CONNECT APP

Scan the QR code and connect to the chargepoint via Bluetooth.

Configure and connect using Wi-Fi, Ethernet or 4G in seconds.

You're all set! The chargepoint is ready for testing.

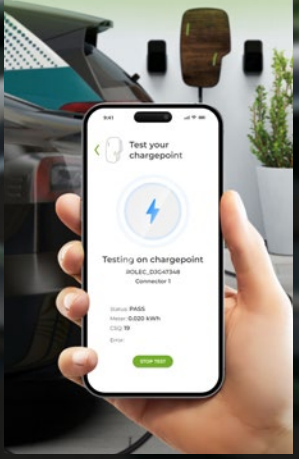

Create and manage new and existing projects with ease!

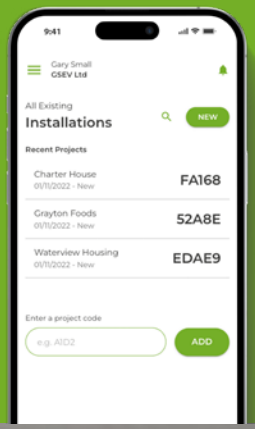

Add additional chargepoints to sites in the future with just a few taps.

Once installed, Owners can take control of their chargepoint's settings.

OUR CUSTOMERS

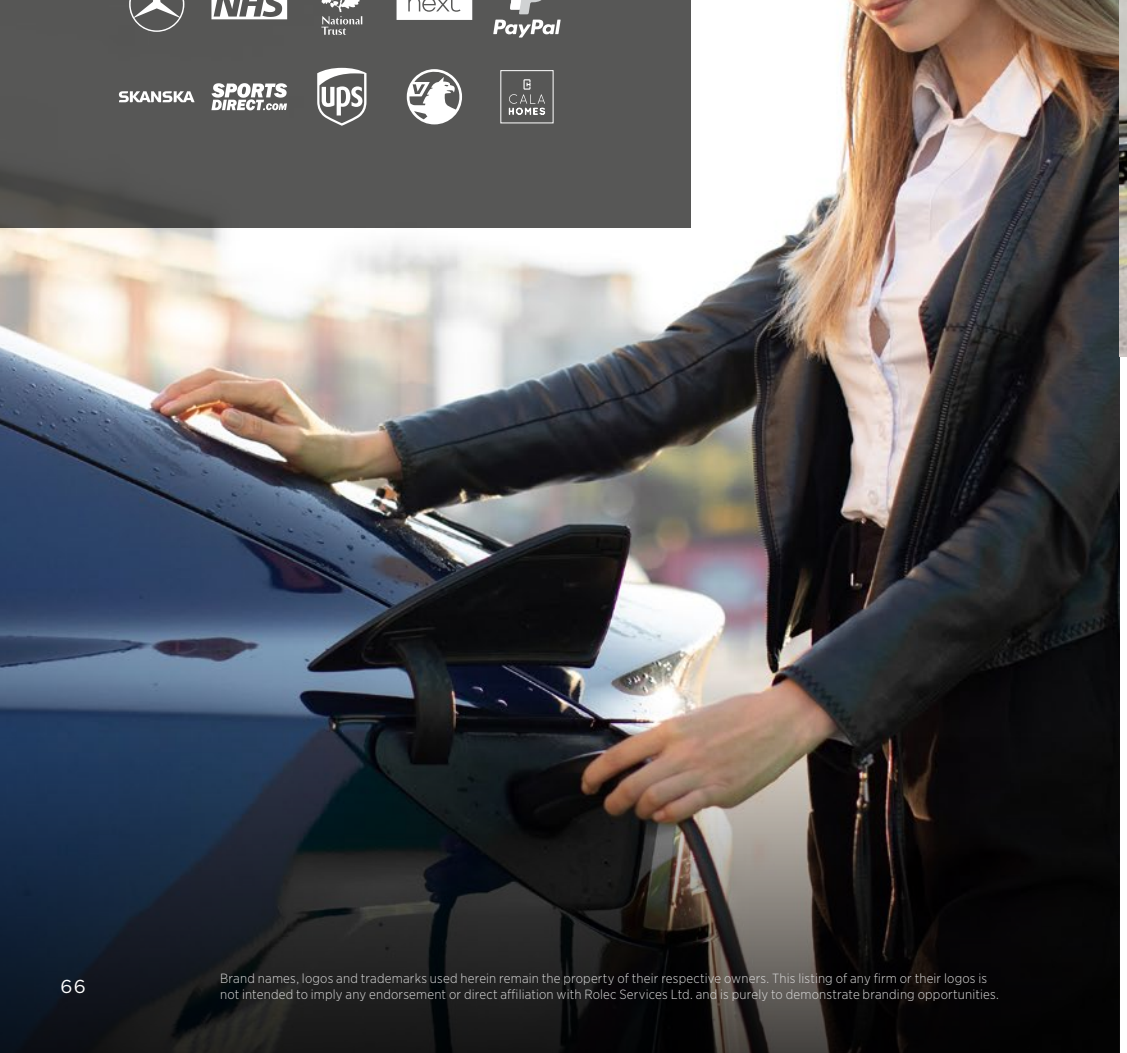

Case studies:

Workplace charging

Saint-Gobain

Saint-Gobain UK & Ireland, one of the UK's largest manufacturers and distributors of building solutions has signed a new partnership with Rolec, one of the UK's leading charging manufacturers, to support the delivery of a 1,000 charging point network across Saint-Gobain's sites, offices and retail branches over the next 5 years. The agreement comes on top of Saint-Gobain's recent commitment to move all of its 3,200 company cars to fully electric by the end of 2023.

The 1,000 charging point network will be connected to Rolec's charger management system, VENDELECTRIC and will allow colleagues and visitors to recharge whilst on-site with brands such as Jewson, British Gypsum, Gibbs & Dandy, Minster, JP Corry, and all Saint-Gobain office locations. All Saint-Gobain UK & Ireland brands will benefit from chargers being installed; 500 of the 1,000 locations will be at Jewson branches.

Brand names, logos and trademarks used herein remain the property of their respective owners. This listing of any firm or their logos is not intended to imply any endorsement or direct affiliation with Rolec Services Ltd. and is purely to demonstrate branding opportunities.

Case studies:

Destination charging



Lake District National Park

Rolec worked closely with AMP EV to support the Lake District National Park's electrification journey. Our QUANTUM (AC fast) and UFC 200 (DC rapid) charging stations, complete with a back-office management system that enables Lake District National Park Authority to open up its charging network to the general public. Now benefiting from 28 EV charging points and allowing their own fleet drivers and EV driving visitors to recharge seamlessly.

Lake District National Park Authority has recently implemented various initiatives to support its aims of becoming net zero by 2025. Implementing an electric fleet and deploying EV charging infrastructure across multiple locations play a significant role in meeting their net zero targets. Whilst fleet drivers are provided with the advantages of greener working operations, the general EV driving public are now provided with the facilities to recharge their vehicles when travelling from the district.

Residential charging

Battersea Power Station

As part of a £9 billion project in central London, Battersea Power Station will be having a 500 strong EV chargepoint network that will enable residents to use their personal security/access RFID card to activate any chargepoint.

The installation of Rolec's SECURICHARGEs and the combination of a smart back-office management solution, including tailor-made load management software enabled residents to recharge whilst completely integrating with the site's management agency.

Due to limited power availability, Battersea Power Station significantly benefited from VENDELECTRIC's, Electricity Load Management feature, that ensures all charging facilities are available to use at all times.

Case studies:

Fleet charging

Development charging

First York

Rolec EV have collectively provided 1,620kW of power via 70+ charging points, including a combination of 22kW AC Type 2 charging sockets and an 8kW dual outlet DC Ultra-Fast Rapid Charger. Having this infrastructure in place allows up to 72 electric bus drivers to park and charge their vehicles overnight in unison before carrying out their journeys the following day. First York has also benefited from Rolec EV's bespoke back-office communications service, which supplies the bus operators with smart charging capabilities of managing charging activity, history, vehicle migration and more.

The government's Net Zero initiative, reaching zero carbon emissions by 2050 is now well underway with various industries opting to future-proof their fleets. The partnership between Rolec EV and First York has come at a time where the electric vehicle industry is experiencing exceptional growth, especially for establishments who are keen to enhance their environmental efforts.

Keepmoat Homes

All new residential buildings from June 2022 must be equipped with smart electric vehicle chargepoint as an aim to encourage EV uptake. Major properties with 10+ parking spaces that are undergoing development will also require at least one chargepoint for each dwelling with associated parking as well as cable routes for all spaces without chargepoints.

Rolec was recently appointed to supply electric vehicle chargepoints for a Keepmoat Development in Doncaster which features over 600 houses all fitted with a WALLPOD charging unit.

Many other key housing developers including Barrett Homes, Kier, Taylor Wimpey, Redrow Homes, Bloor Homes, Fairview Homes, Cala Homes, Elan Homes, Bellway Homes, Orbit Homes, and Persimmon Homes have also opted for Rolec's cost-effective charging solutions on their developments past and present.

Case studies:

Commercial charging

Meadowhall

Leading shopping and leisure destination, Meadowhall collaborated with Rolec EV to implement over 50 charging points for their customers to use for free across two car parks. Our sleek and dynamic QUANTUMs can be spotted in various bays including disabled and parent & child parking bays.

By integrating the chargepoints to VENDELECTRIC, our smart back-office management system, Meadowhall can now benefit from operating their own bespoke charging network whilst also deploying all aspects of EV charging within a tailor-made management solution.

ROLEC EV

When it comes to progress, we say

'Roll on electric!'

Leading the charge towards a greener future since 2007

ROLEC

Caravan hook-up solutions & Marina services

PRODUCT CATALOGUE

www.rolecserv.com/catalogue

Information provided is non-contractual but was believed to be correct at the time of publication (E&OE).

ROLEC EV

t: 01205 724773
e: wholesaleorders@rolecserv.co.uk

www.rolecserv.com

Issue 4
April 2023