



ROLEC

ULTRACHARGE 400

Intelligent ultra-rapid EV charging station



Stocked in
the UK by
ROLEC

ULTRACHARGE 400

Intelligent ultra-rapid EV charging station

An intelligent modular and scalable DC ultra-rapid charging station, the ULTRACHARGE 400 has the ability to be upgraded in modules of 40kW, all the way up to 400kW, making it the perfect futureproof and cost-effective solution for public, fleet, marina and highway infrastructure deployment.

This high powered, advanced and robust charger is available in six standard power configurations; choose from 200kW, 240kW, 280kW, 320kW, 360kW or 400kW.

Offering convenient charging times for every EV with the ability to charge two vehicles simultaneously. Charging can be activated via either plug & go, mobile app or RFID. A contactless payment terminal option is also available.

Designed with installers and chargepoint owner / operators in mind, these chargers are easy to install, maintain and service.



Product features

- Plug & go, mobile app, or RFID controlled charging
- Offers 2x DC charging outputs
- Up to 400kW charging speeds
- Upgradeable power modules
- OCPP 1.6 compliant, OCPP 2.0.1 (future) – integrates with any CPMS
- Over-the-air firmware and software updates
- Built-in 30mA Type A RCD protection
- Intelligent dynamic power sharing
- Supports static and dynamic load management
- 10.1" HD user interface screen
- 4G / Wi-Fi / Ethernet connectivity
- 95% Peak efficiency
- Ultrawide power output voltage range 150V – 1000V
- Under/overvoltage, DC overcurrent, over-temp & surge protection
- 5m 500A Peak and 375A Nominal charging cables, capable of delivering 200kW charge rate to a standard 400V vehicle
- Cable management system as standard
- Optional 7m cables also available
- Optional RFID / NFC / contactless card payment terminal
- Conforms with PAS 1899 accessible charging standard
- Strong and durable IP54 / IK10 rated



OCPP 1.6 compliant (OCPP 2.0.1 future)

Ability to integrate with any OCPP compliant chargepoint management system and app.



Easy to operate

Quick and simple ways to operate; plug & go, app, RFID card/fob, or optional contactless payment.



Reliable & scalable EV charging solution

Offers world-class quality and reliability through field-proven infrastructure solutions.



Always connected

Complete with secure 4G, Wi-Fi and Ethernet connectivity, ensuring chargers are always online 24/7.



Branding & colour options available

Rolec offers a bespoke chargepoint branding service; from logos & brand colours, to vinyl wraps.



DC Rapid charging connectors

Up to 400kW CCS2 DC charging output, adding up to 300 miles in just 15 minutes*.

*vehicle dependent

The details

UP TO 400kW

Using 40kW power modules, this futureproof ultra-rapid charging unit is upgradable from 200kW to 400kW charging speeds.

Dual 5m 500A Peak and 375A Nominal CCS2 charging cables.

MAXIMISE YOUR ROI

150V-1000V dual power output segment, improves the power utilisation ratio of the DC charger, speeding up charging times and maximising revenue.

Delivers up to 80% charge in under 10 minutes.

POWER SHARING

The ULTRACHARGE 400 features cutting-edge intelligent dynamic power sharing, automatically adjusting power distribution based on each vehicle's needs.

Perfect for sites where two vehicles need to charge simultaneously.



SAFE AND SECURE

Packed with protection features including; under/overvoltage, DC overcurrent, over-temperature & surge protection.

Over-the-air updates allow the chargers to receive the very latest features, ensuring a safe and future-proof product 24/7.

WIDE OUTPUT RANGE

Ultra wide output voltage range 150V-1000V.

Not only can it meet the low-voltage charging needs of conventional EVs, but also meet the requirements for charging larger commercial vehicles such as HGVs, buses and boats.

Specifications

Product Overview

Station Level	Connection Type	Power Allocation	Input Current	Input Power	Unit Colour	Product Code
200kW DC	2x CCS2	1x 200kW 1x 80kW/1x 120kW*	317A	220kVA	● Grey	ROLEC400200
240kW DC	2x CCS2	1x 240kW 2x 120kW*	380A	264kVA	● Grey	ROLEC400240
280kW DC	2x CCS2	1x 280kW 1x 120kW/1x 160kW*	444A	307kVA	● Grey	ROLEC400280
320kW DC	2x CCS2	1x 320kW 2x 160kW*	507A	351kVA	● Grey	ROLEC400320
360kW DC	2x CCS2	1x 360kW 1x 160kW/1x 200kW*	571A	395kVA	● Grey	ROLEC400360
400kW DC	2x CCS2	1x 400kW 2x 200kW*	634A	439kVA	● Grey	ROLEC400400

*When 2 vehicles are charging simultaneously

Flexible configuration

All units can be configured to a lower output to meet site power limitations. When power output is reduced, the unit's dynamic power sharing will automatically adjust accordingly. For example:



Model	Power Allocation
360kW model configured to 300kW	1x 300kW 2x 150kW*

*When 2 vehicles are charging simultaneously

Easily upgradeable


40kW power modules for future scalability.



Specifications



Unit Dimensions

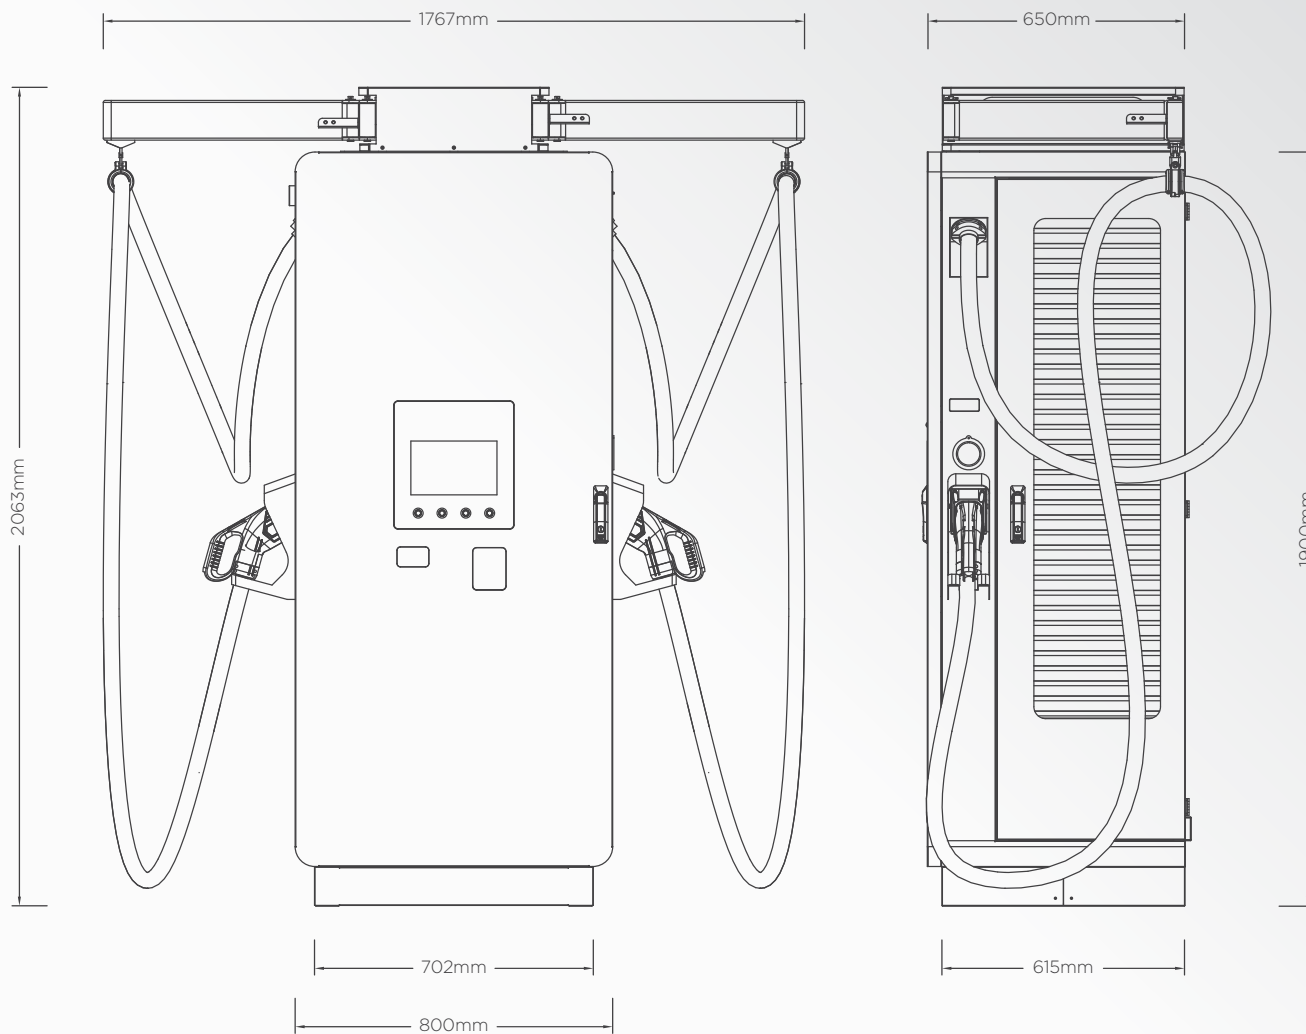UltraCharge 400:



Specifications


Technical Data

User Interface	<ul style="list-style-type: none"> 10.1" LCD display RFID reader (ISO/IEC 14443A: MIFARE Classic EV1) Optional NFC contactless card payment terminal RGB LED status indicator Supported Languages – English, French, German, Italian, Spanish (other languages available on request)
Charge Protocol	Mode 4 (IEC 61851-23)
Protection	<ul style="list-style-type: none"> 30mA Type A RCD Undervoltage & overvoltage protection DC overcurrent protection Over temperature protection Surge protection device Emergency stop button Flood and smoke detection Relay welding detection Advanced dynamic power balancing Supports static and dynamic load management (software configurable) (may require additional hardware)
Input	<ul style="list-style-type: none"> AC Input Voltage – 400V AC (+/-10%) Input Frequency – 50-60 Hz Input Type – 3P + N + PE Power Factor – ≥0.99 THDi – <5% at normal power Grounding type – TN, TT Overvoltage Category – OVC III, DIN EN 60664-1
Output	<ul style="list-style-type: none"> Connector Options – CCS2 (other configurations available on request) DC Output Voltage Range – 150-1000Vdc Maximum Output Current – 500A Rated Power – DC: Up to 400kW (model dependent) Connector Rate Current – 375A Peak Efficiency – ≥95% Cable Length – 5m (extended 7m cables also available)
Communications	<ul style="list-style-type: none"> 4G GSM (built-in nano SIM(s), subscription required) Wi-Fi RJ45 Ethernet connection OCPP 1.6J OCPP2.0.1 (future)
Dimensions	800mm x 2063mm x 650mm (W x H x D)
Weight	< 550kg (model dependent)
Environmental	<ul style="list-style-type: none"> Ingress Protection – IP54 Enclosure Protection – IK10 Screen Protection – IK08 Operating Temperature – -30°C to +50°C Humidity – 5%-95% Cooling Method – Air cooled Maximum Noise Level – <75 dB on Full Load (1m / 25°C)
Materials	<ul style="list-style-type: none"> Body – Stainless steel Finish – All-weather powder-coated finish
Unit Colour	<div>  Grey  Other colours and branding options are available upon request </div>
Certifications & Compliances	<ul style="list-style-type: none"> EV Charging Compliance – EN 61851, IEC 62196, DIN 70121, IEC 61000 ENA Database Accessibility – PAS 1899 accessible charging standard Payter Payment Device (where fitted) – CE, FCC, RoHS, WEEE, REACH, EMVCo, PCI-PTS 6.x, TQM, MasterCard, VISA, American Express, Discover, Diners[®] Certifications – CE, UKCA, TUV. Optional Eichrecht (from October 2025)
Use Life	10 years
Warranty	2 years (extended warranty available upon request)



Options & accessories

Product Code	Item Description
UCPM40040	40kW Power upgrade modules
EVAD8000	Add contactless payment terminal (inc. router)
EVAD4007	Upgrade to 7m 500A Peak/375A Nominal cable (per cable)
RFID0010	RFID card
RFID0020	RFID fob
EVCB0020	Root mount protection barrier – 48mm
EVCB0040	Surface mount protection barrier – 48mm
EVPS0010	EV parking sign – A4 landscape (Other sizes are available)
ACSR0525	Perific Max Fuse Protection Device with 3x 900A up to 36mm ² Current Sensors
ACSR0535	Perific Max Fuse Protection Device with 3x 900A up to 100mm ² Current Sensors
COMM5000	Factory configuration & pre-commissioning service (per unit)
Contact Roolec	CHAdEMO outlet models available

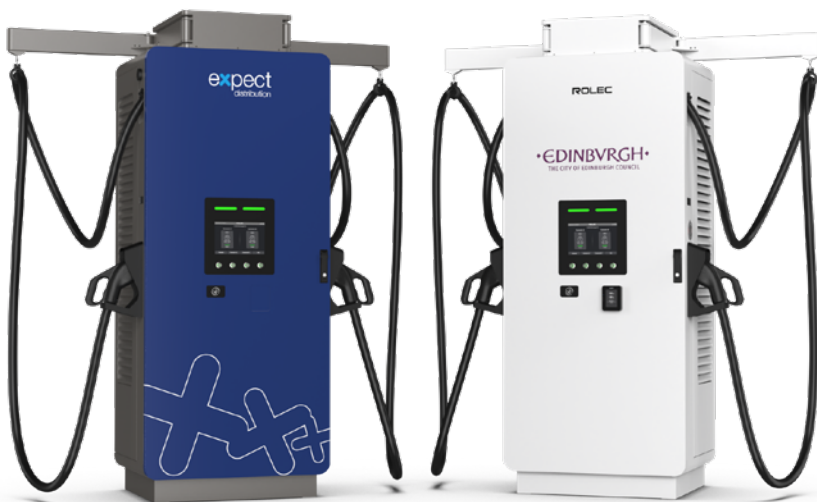


Branding & colour options available

Roolec offer a bespoke chargepoint branding service; from logos & brand colours, to vinyl wraps. This can be arranged at time of order. Contact ROLEC for details.



Chargepoint management & operation

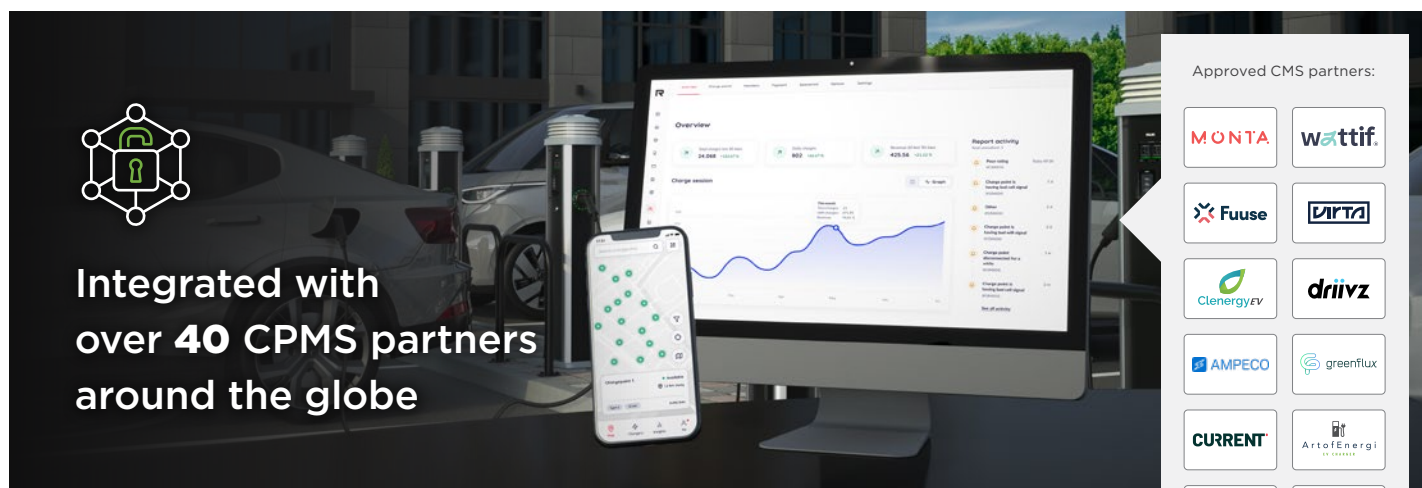

Integrated with over 40 CPMS partners around the globe








Approved CMS partners:

MONTA	wattif
Fuuse	VIRTA
ClenergyEV	drivz
AMPECO	greenflux
CURRENT	ArtofEnergy
connekt	Spirii
ROAM	NOR+HE
STUART ENERGY	wevo
ChargePanel	MOBILITY 46
RE&GO	+ many more



Chargepoint operators

ROLEC EV chargepoints boast an array of intelligent features. When combined with any approved OCPP compliant chargepoint management system (CPMS), chargepoint operators will have the ability to deploy and self-manage their own public and/or private EV charging network. Ideal for workplace, fleet, commercial and residential locations.

-  Businesses can easily manage their network of chargepoints
-  Conveniently set chargers to be private or publicly accessible
-  Offer pay-to-charge solutions and benefit from generating additional revenue
-  Set custom & flexible tariffs for different customer or charger groups
-  Access advanced features including dynamic load management (DLM)
-  Users can operate chargepoints via mobile app, RFID, contactless payment (model dependent), or a remote contactless payment terminal (contact ROLEC for more information about the TAP & CHARGE solution)
-  24/7 support for users and operators of the chargepoints








NEED ADVICE?

Speak to a member of the team to find the right solution for you



Chargepoint users

Take full control of your EV charging experience and maximise the intelligent features of the chargepoint management system.

-  Locate and navigate using the chargepoint map
-  Easily initiate and pay for charges
-  Real-time information to maximize your charging experience
-  Access to benefits and rewards for EV drivers
-  24/7 support for help when you need it most



Please Note: All chargepoint management and operation features are subject to the specified CPMS



THIS DOCUMENT CONTAINS INFORMATION THAT IS SUBJECT TO CHANGE WITHOUT NOTICE.
The latest version of this publication can be downloaded at www.rolecserv.com/downloads-ev-charging

Illustrations of the product and user interface are for marketing purposes only.

Brand names, logos and trademarks used herein remain the property of their respective owners.
This listing of any firm or their logos is not intended to imply any endorsement or direct affiliation with Rolec Services Ltd. and is purely to demonstrate branding opportunities.

© 2025 by Rolec Services Ltd. All rights reserved.
EVUC400D-V01-R0 UltraCharge 400 Data Sheet



ROLEC

t: 01205 724754
e: enquiries@rolecserv.co.uk
www.rolecserv.com

